A MICROWAVE, DIRECTION-MODULATED, HYPERBOLIC, NAVIGATIONAL SYSTEM

Robert Charles Krulish
and
Carl Stevens Mathews

A MICROWAVE, DIRECTION-MODULATED, HYPERBOLIC, NAVIGATIONAL SYSTEM

by

ROBERT CHARLES KRULISH
B.S., U.S. Coast Guard Academy
(1946)

and

M854
Thesis:
lemy
KRULISH
1954
T
K87

FILLMENT
OR THE
NEER

Letter on the front cover:
A MICROWAVE, DIRECTION-MODULATED,
HYPERBOLIC, NAVIGATIONAL SYSTEM
Robert Charles Krulish
and
Carl Stevens Mathers

ITUTE OF
1
4

A M
HY

1854

On spine:

KRULISH .

1954

TK7815
K87

Letter on the front cover:

A [illegible] CIRCUIT-[illegible],
HY[illegible]

Robert Charles Krulish
and
Carl Steven Mathews

A MICROWAVE, DIRECTION-MODULATED, HYPERBOLIC, NAVIGATIONAL SYSTEM

by

ROBERT CHARLES KRULISH
B.S., U.S. Coast Guard Academy
(1946)

and

CARL STEVENS MATHEWS
B.S., U.S. Coast Guard Academy
(1948)

SUBMITTED IN PARTIAL FULFILLMENT
OF THE REQUIREMENTS FOR THE
DEGREE OF NAVAL ENGINEER

at the

MASSACHUSETTS INSTITUTE OF
TECHNOLOGY
JUNE, 1954

ABSTRACT

A MICROWAVE, DIRECTION MODULATED, HYPERBOLIC NAVIGATIONAL SYSTEM

Robert C. Krulish

Carl S. Mathews

Submitted to the Department of Naval Architecture and Marine Engineering on 24 May 1954, in partial fulfillment of the requirements for the degree of Naval Engineer.

The object of this thesis is to delineate a navigational system capable of prescribing an arbitrary locus, such as a winding harbor channel, with an accuracy which will allow a navigator to negotiate such a channel safely in periods of darkness, fog, or low visibility; and to evaluate usefulness of system devised in solution of the navigational problem.

The time difference in receipt of signals simultaneously transmitted from two precisely located stations determines a hyperbolic line of position. If a delay is introduced between transmitted signals, the time difference for a certain line of position can be made arbitrary. If the radiation pattern of one station is made highly directional, the time difference may be made arbitrary on a small segment of a hyperbolic line of position. If the beam antenna is rotated, and a continuous variable delay is introduced which is a function of angle and an arbitrary line, the time difference in receipt of signals can be made to define the arbitrary line. This is a Microwave, Direction-Modulated, Hyperbolic Navigational System.

Procedures are developed for determination of system design parameters for application to any specific harbor, and for estimation of system error in this application.

These procedures are used, for determination of details for Boston Harbor, and are evaluated experimentally.

Results show that, in Boston Harbor, the system will allow a ship to stay within approximately 150 feet of the center of the safe navigable channel.

There were no peculiarities of Boston Harbor apparent which would indicate that accuracy of the same order could not be expected for numerous other applications.

Thesis Supervisor: Karl W. Keller, S.M.
Assistant Professor of Electrical Engineering

~~25072~~
28826

Harold T. Grellah

Karl A. Dahlman

Questions in the Improvement of Naval Destroyers and Various Implements in Ship Style, in Partial Fulfillment of the Requirements for the Degree of Naval Engineer.

The object of this thesis is to introduce a mathematical system of accounting as efficiency items, such as a ship's hydrodynamic resistance, with an operator which will allow a designer to maximize such a dimensional matrix in regards of economy, i.e. to its viability, and to evaluate deficiencies of system involved in solution of the investigational problem.

The time difference in reaching at elements eventually considered, from the previously located station determines a hydraulic line of reaction. If a delay is introduced between successive signals, the time difference for a special line of position can be made available. If the resulting patterns of one station is fairly direct lines, the time differences may be made arbitrary so a small segment of a hyperbolic line of position. If the time between is constant, and a condition existing only in intervals which is a function of which the accuracy lies, one time difference in receipt of signals can be made to notice the arbitrary line. This is a difference, therefore-mathematical, hyperbolic navigational system.

Procedures are developed for determination of system design parameters for application to any specific location, and for evaluation of system error in this application.

These procedures are used, for determination of depths for typical harbor, and are evaluated statistically.

Despite good cause, in harbor defense, by system will allow a ship to stay within approximately its fleet of the center of the safe particular channel.

There are of possibility of further further expected which would indicate that accuracy if the same study could not be expected for numerous other applications.

Thesis Supervisor: Carl C. Collins, U.S.
Associate Professor of Electrical Engineering

Cambridge, Massachusetts
May 24, 1954

Professor Leicester F. Hamilton
Secretary of the Faculty
Massachusetts Institute of Technology
Cambridge, Massachusetts

Dear Sir:

In accordance with the requirements for the degree of Naval Engineer, we submit herewith a thesis entitled, "A Microwave, Direction-Modulated, Hyperbolic Navigational System."

Respectfully,

ACKNOWLEDGMENT

The authors would like to express their appreciation to Prof. Earl W. Keller, S.M. of M.I.T., who, as thesis advisor, was helpful throughout the progress of the work, and to Paul W. Murray, Project Technician of the Communications Laboratory, whose able assistance was indispensable to successful completion of experiments.

TABLE OF CONTENTS

CHAPTER 1 INTRODUCTION AND SUMMARY Page

1.1 Aids to Navigation and Homing Devices.....1

1.2 Surface Homing Problem and Solution by Proposed System.....2

1.3 Procedure.....7

1.4 Results and Conclusions.....9

CHAPTER 2 DETERMINATION OF FUNDAMENTAL GEOMETRIC RELATIONS

2.1 Derivation of Equation for Introduced Delay.....10

2.2 Geometrical Accuracy.....12

2.3 Factors Effecting Readable Accuracy.....14

2.4 Location of Stations.....15

CHAPTER 3 APPLICATION OF PROPOSED NAVIGATIONAL SYSTEM TO BOSTON HARBOR

3.1 Determination of Parameters.....17

3.2 Specifications for Design of Equipment.....19

CHAPTER 4 EXPERIMENTAL EVALUATION OF SPECIFICATIONS

4.1 Test of Critical Components without R.F. Link.....22

4.2 Test of Critical Components with R.F. Link.....25

4.3 Evaluation of Experimental Results.....26

CHAPTER 5 DISCUSSION OF RESULTS AND CONCLUSIONS

5.1 Summary of General Results.....27

5.2 Determination of Timer and Indicator Errors.....29

5.3 Practical Results.....30

5.4 Conclusions.....33

Table of Contents

Chapter 1 Introduction and Overview ..... Page

1.1 Role of Aeronautical Testing .....

1.2 Historical Context: Evolving Test Methods and Technologies .....

1.3 Fundamental Principles .....

1.4 Overview of Test Categories .....

Chapter 2 Characteristics of Laboratory Environments

2.1 Comparison of Testing and Operational Environments .....

2.2 Environmental Simulation .....

2.3 Testing Different Vehicle Components .....

2.4 Limitations of Simulation .....

Chapter 3 Principles of Measurement Systems in Laboratory Testing

3.1 Characteristics of Instrumentation .....

3.2 Considerations for Design of Instrumentation .....

Chapter 4 Instrumentation Principles of Electrical Systems

4.1 Theory of Electrical Components without Moving Parts .....

4.2 Theory of Electrical Components with Moving Parts .....

4.3 Selection of Instrumental Quantity .....

Chapter 5 Transducers in Testing and Instrumentation

5.1 Principles of Transducer Operation .....

5.2 Characteristics of Linear and Nonlinear Devices .....

5.3 Practical Considerations .....

5.4 Classifications .....

Page

CHAPTER 6 RECOMMENDATIONS FOR FUTURE DEVELOPMENTS.....33

APPENDIX

A.1 Summary of Symbols and Equations.....35

A.2 Loci of Radial Sensitivity.....36

A.3 Derivation of Equation for e_d.....38

A.4 Detailed Data for Boston.....40

A.5 Details of Experiments.....42

A.6 Supplementary Discussion.....53

A.7 Bibliography.....55

Page

A.1 ..... [illegible]

A.2 ..... [illegible]

A.3 ..... [illegible]

A.4 ..... [illegible]

A.5 ..... [illegible]

A.6 ..... [illegible]

A.7 ..... [illegible]

LIST OF ILLUSTRATIONS

		Page
1.1	Boston Harbor Chart	4
1.2	Equipment Components	8
2.1	Normal Hyperbolic Pattern	11
2.2	Co-ordinate System	11
2.3	Loci of Radial Sensitivity	13
2.4	Effect of Track Angle on P.D.	13
4.1	Simplified Diagram for Critical Component Test Without the R.F. Link	22
4.2	Simplified Diagram for Critical Component Test With R.F. Link	22
5.1	Illustration of Incidence of e_d	26
A.1	Determination of da/dθ	39
A.2	Plot of Introduced Delay vrs. θ	41
A.3	Circuit Diagram of Variable Delay	43
A.4	Details test 1	44
A.5-7	Pictures of Scope Presentation	45,46,47
A.8	Equipment test 2	48

Page

1.1 Boston Harbor Study Area 2

1.2 Regional Topography 3

1.3 Normal Operation Schematic 11

1.4 Combined System 11

1.5 Separate Storm Drainage 12

4.1 Effect of Tunnel Slope on T_{sc} 22

4.2 Simplified Diagram for Original Conceptual Tunnel
Schematic Used in T_{sc} Study 23

4.3 Simplified Diagram for Original Conceptual Tunnel
With T_{sc} Lines 24

B.1 Illustration of Location of ϕ_0 30

A.1 Determination of dy/dx 39

A.2 Plot of Intermediate Depth (Y_{mi}) Versus ϕ 41

A.3 Circular Diagram of Vertical Velocity 43

A.4 Example Case 1 44

A.5 Circular Diagram of Energy Dissipation 45

A.6 Example Case 2 46

CHAPTER 1

INTRODUCTION AND SUMMARY

1.1 Aids to Navigation and Homing Devices

The problem of navigation has invited the interest of many and the life work of some in its development from a mystical art to the exact science we know today. One of the most important problems of navigation is position finding. If the navigator is in familiar territory, landmarks or other physical objects might give him a key to his position. Celestical navigation methods extend the scope of "familiar territory" practically to the entire surface of the earth. However, weather conditions or poor visibility sometimes make use of these natural aids impossible. Artificial devices of various kinds---lights, fog horns, bells, buoys---were used as navigational aids early in maritime history. These devices are, however, limited in effectiveness by the same factors which limit use of natural aids.

With the advent of radio came a new era in the fields of navigation. Beginning early in this century, radio became the tool for rapid development of new aids to navigation which were less dependent on weather and visibility for accurate, dependable service.

World War II gave tremendous impetus to the development of entire new systems of navigation which enabled ships and aircraft to determine their position accurately on trips of thousands of miles without seeing a single star or landmark. The configurations or patterns of lines of position given by these systems (reduced to simpler terms of plane rather than spherical geometry) have taken three basic forms:

CHAPTER I

INTRODUCTION AND METHOD

1.1 Aids in Navigation and Basic Methods

The problem of navigation has limited the interest of many and the time and energy of some in its development from a practical art to the exact science we know today. One of the most important problems of navigation is position finding. If one navigator is in familiar territory, landmarks or other physical objects might give him a key to his position. Celestial navigation methods extend the range of "familiar territory" practically to the entire surface of the earth. However, neither consideration of pure probability nor the use of these natural aids bypasses difficulties. Artificial devices of varying types---lights, for water, radio, etc.---were used for navigational aids early in warfare history. These devices are, however, limited in effectiveness by the same factors which limit use of natural aids.

With the advent of radio came a new era in the field of navigation. Beginning early in this century, radio became the tool for rapid development of new kinds of navigation which were less dependent on weather and visibility for accurate, dependable service.

Basic also it gave tremendous impetus to the development of entire new systems of navigation which enabled ships and aircraft to determine their position accurately on trips of thousands of miles without sextant, a study also by Lacaze. The configurations or patterns of lines of position given on these systems (referred to simply here as lines of position) have taken three basic forms:

(1) Straight lines,

(2) Circles, and

(3) Hyperbolas.

Aircraft beacons, shoran, and loran respectively furnish these three types of pattern.[1*] Position finding by use of these methods resolves into the determination of two or more lines of possible position.. The intersection of these lines of position determines the actual position of the craft. If a line of position obtainable from one of these systems happens to pass through or near the navigator's destination, the problem of nagivation resolves into staying on the line of position through the destination, and obtaining occasional cross checks of position along that line. This process is called homing. Present systems can be used successfully for homing, provided the course to be followed is a straight line, a circle, or a hyperbola. Ships and aircraft can home on one or more of these systems to a harbor entrance or to the vicinity of an airstrip. Here a local system is required to give the navigator or pilot information which would allow him to negotiate a restricted harbor channel into port, or maintain a proper glide path to a landing. The system problem for aircraft has been solved satisfactorily by several means and will not be discussed here.[2] The surface problem is more complicated, and, to date, has received little attention.

1.2 Surface Homing Problem in Harbors and Solution by Proposed System

Define the surface system problem as follows:

I. Coverage from outer harbor (or terminus of other homing system) to inner harbor.

---

* All superscripts refer to references listed in the Appendix.

* All copyrights subject to reservations listed in the foreword.

II. Rapid, accurate, and continuous indication of deviation from safe navigable waters.

III. Satisfactory operation at night, in fog, and in periods of low visibility.

In addition to these requirements, it would be desirable to have the following system characteristics:

1. Simple, low-cost receiving and indicating equipment,
2. Minimum accuracy dependence on receiving and indicating equipment.
3. Minimum interference with present radio navigational systems, commercial and military communications systems, and present electronic installations.
4. Simple, reliable, stable transmitting and control elements.
5. Provisions for wartime security and adaptability to military problems.

Consider more closely the three major requirements. Requirement I limits the range of operation or coverage of area to a radius of five to twenty miles. A radio device of moderate power could give satisfactory performance at all frequencies up to 10,000 MC. Requirement III could also be met by a similar device. Requirement II, therefore, specifies the major portion of the solution which is not readily apparent.

The "safe navigable waters" of a harbor channel are not, unfortunately, a single straight line, circle, or hyperbola over a large portion of the channel length. The system, therefore, must establish lines of position which are arbitrary, and which follow the line of the channel in any harbor where the system is installed. The accuracy of transverse position in the channel should be such that the navigator can readily determine the

FIGURE 1.1

BOSTON HARBOR

safety of his position.

Several types of systems might be devised to give a satisfactory solution to the problem. A straight-line system using one beacon for each straight-line segment of a channel could possibly be used, but the number of beacons required would be large. Circular or hyperbolic systems such as Shoran or Loran could be modified to give position determination to required accuracy, but these systems would require extremely complex computing devices in the receiver to enable following an arbitrary line.

Present hyperbolic navigational systems, such as Gee, and Loran transmit accurately synchronized pulses from two stations separated geographically by a specified distance. A receiver at a point in the coverage area receives one signal before the other. The time difference in receipt of the two signals determines a hyperbolic line of position. This type of system seems to be most readily adaptable to requirements of the problem. These systems use omnidirectional antennas, and cover the entire service area with each transmission.

If the radiation pattern of one of the stations were to be changed to a narrow beam, the coverage area would be restricted to the sector of the beam, and the pattern of lines of position would be segments of the normal hyperbolic pattern. Furthermore, if a time delay is introduced in the transmission of pulses from the beam antenna, the modified time difference in receipt on a segment would be the sum of the normal time difference and the introduced delay. Thus, any segment may be made the zero time difference segment by introducing the proper delay. A course line passing through the narrow beam will intersect a hyperbolic segment. By introducing proper delay, the intersection could be made a point of zero time delay.

The beam antenna could be rotated, a small amount. The coverage area would then be another sector, on a different bearing from the first sector. Here, also, a delay could be introduced to make a point on course line a point of zero time difference. If, now, the beam antenna is rotated continuously, and the proper delay is introduced on each bearing, the course line becomes the zero time difference line.

In further discussion of the system, the zero time difference line will be made to follow a specified track. The transmitter with an omni-directional or very broad radiation pattern will be called the "Fixed" station. The other transmitter with a very narrow beam antenna and rotating at constant speed will be called the "Rotating" station.

The signals to control the two transmitters will originate in a "Timer" located at the Rotating station. The timing signal for the Rotating station will be delayed by a function of the antenna rotation, such that the signals from the Fixed and Rotating stations will arrive simultaneously at the intersection of the rotating antenna beam and track line. Thus at any point on the track line the time difference reading will be zero.

The system described differs from the normal hyperbolic system in two basic ways:

(1) The radiation pattern from one of the stations must be highly directional, and

(2) A variable delay which is a function of bearing and course position is introduced between pulses transmitted from the two stations.

Since high directivity is required, a microwave system would be most practicable. The resultant system is a "Microwave, Direction-Modulated,

Hyperbolic Navigational System." Such a system is capable of generating arbitrary loci of constant time difference, and might be used to obtain the solution to the problem stated. For system components see Fig. 1.2.

1.3 Procedure

The derivation of governing equations was the first step in the development of the system. Before proceeding further it was necessary to derive equations defining system parameters, and to determine by analysis of these equations, what factors would control the accuracy of the system.

To transfer from the realm of theory to the realm of reality, it was necessary to obtain an idea of orders of magnitude of system parameters for a particular case. For this investigation, Boston Harbor was chosen. Tracklines were laid out on the chart from the sea-buoy to Charlestown Navy Yard. Sites were chosen for the transmitting stations on the basis of system criteria and topography (see Fig. 1.1). With the equations derived, and with information obtained from application to Boston Harbor, specifications for critical components were determined.

Experimental work was conducted to determine the practicability of equipment specifications. The work was carried out in two phases:

(1) Test of critical components without RF link.

(2) Test of critical components with RF link.

The first phase of the test was conducted to determine timer accuracy, and to explore the most practicable methods of indication. Significant additional information was gained from these tests concerning the effect on accuracy of spread in time difference due to beamwidth of the rotating antenna, and the effect of intermittent signals from the Rotating station

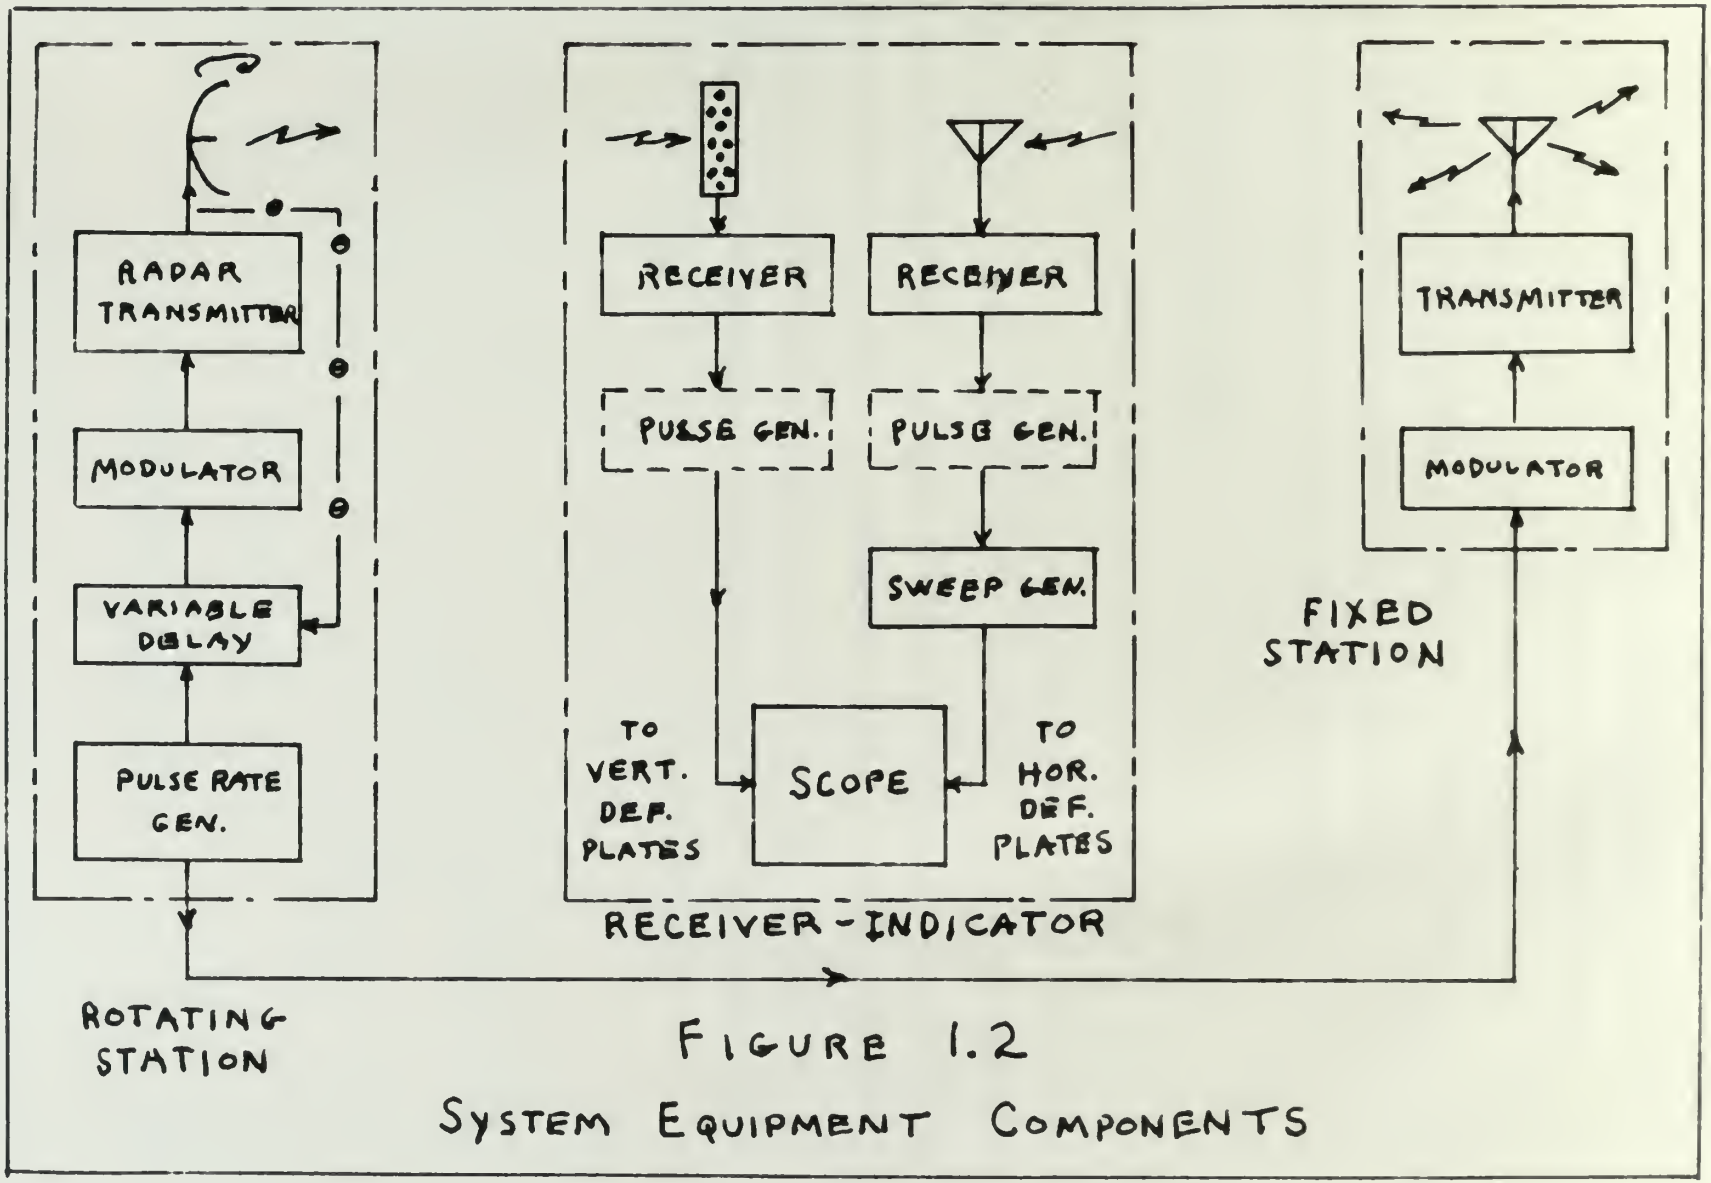

FIGURE 1.2

SYSTEM EQUIPMENT COMPONENTS

(occuring once every revolution of the antenna). The probable readable time difference accuracy as determined by these experiments shows the distance accuracy of the system by application of derived equations.

The second phase of the tests was conducted to confirm results of the first phase. Equations had been derived relating accuracy at any point in the coverage area to accuracy along the base line. Therefore, a test along the baseline was a test of the entire system.

1.4 Results and Conclusions

The probable system error expressed in time difference was found to be 0.1 us. This time difference is equivalent in distance to approximately ± 50 feet on the base line or to a maximum of ± 150 feet anywhere in the coverage area. This type of channel definition is more than satisfactory for Boston Harbor, and should be obtainable for many other harbors. Therefore, we may conclude that the systems of this type would contribute materially to the solution of a navigator's problem of negotiating harbor channels especially in periods of darkness and low visibility.

CHAPTER 2

DETERMINATION OF FUNDAMENTAL GEOMETRIC RELATIONS

The values required for the introduced delay can be obtained graphically from the normal hyperbolic pattern. In Figure 2.1, take a point on the trackline and read from the normal hyperbolic pattern the time delay which would be received at this point. When the antenna is directed at this point a cancelling delay must be introduced in the timer. A mathematical expression for the delay will, however, be more convenient and lend itself more readily to interpretation and evaluation.

2.1 Derivation of Equation for Introduced Delay

The equations are derived in terms of polar co-ordinates about the Rotating Station, and on the assumption that within the region of operation the earths surface can be considered as a plane. Figure 2.2 illustrates and defines the necessary terms.

$$l = L\sqrt{1 - 2a\cos\theta + a^2} \qquad (1)$$

Let there be a timer located at R, which at time t will send a trigger to the transmitter at F. The timer will trigger the transmitter at R at time (t + d), where d is defined as the introduced delay.

Thus one signal will start from R at time t, and travel from R to F to p. This signal will arrive at p at time t_1 where

$$t_1 = t + \frac{L\,(1 + \sqrt{1 - 2a\cos\theta + a^2})}{c}, \qquad (2)$$

and c is the velocity of light.

The other signal will start from R at time (t + d) and travel directly

Section 2

Derivation of Fundamental Equations

The values required for the introduced delay can be obtained graphically from the two-dimensional configuration. In Figure 2.1, take a point on the broadside and treat from the desired direction retrace the time delay which would be necessary at this point. Then the antenna is directed at this point a corresponding delay must be introduced in the other. A mathematical expression for the delay will, however, be more convenient and less time-consuming to interpretation and evaluation.

2.1 Derivation of Equation for Introduced Delay

The equations are derived in terms of polar co-ordinates about the Receiving Station, and of the circumference which defines the region of operation the curved surface may be considered as a plane. Figure 2.2 illustrates and defines the necessary terms.

$$\lambda = \lambda \sqrt{1 - 2\alpha \cos\phi + \alpha^2} \qquad (1)$$

Let there be a timer located at R, which at time t will send a trigger to the transmitter at T. The timer will trigger the transmitter at R at time $(t + d)$, where d is defined as the interference delay.

Thus one signal will start from R at time t, and travel from R to P to p. This signal will arrive at p at time t_1 where

$$t_1 = t + b\,(1 + \sqrt{1 - 2\alpha \cos\phi + \alpha^2}) \,. \qquad (2)$$

and c is the velocity of light.

The other signal will start from R at time $(t + d)$ and travel directly

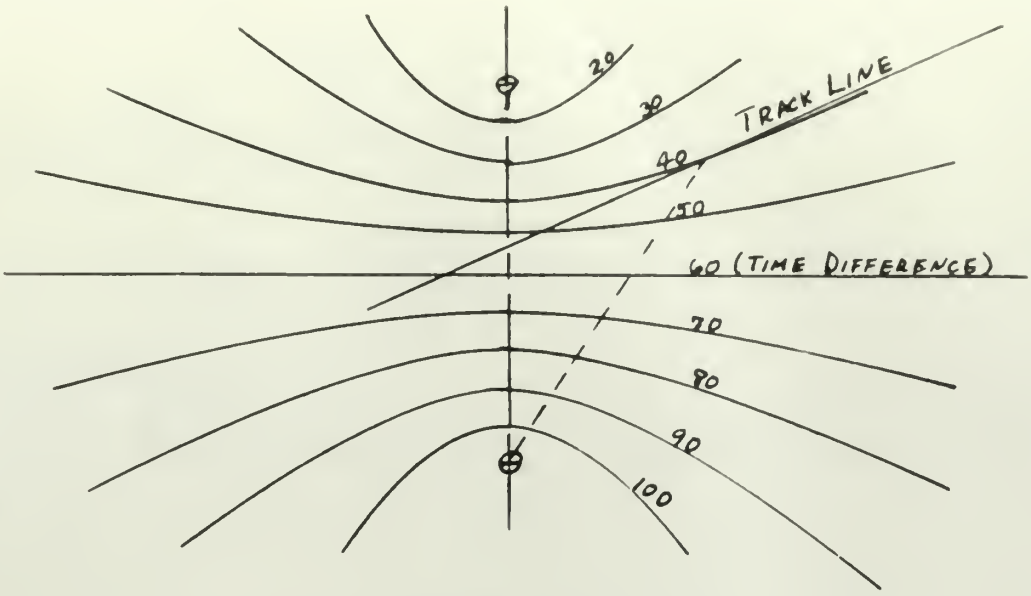

FIGURE 2.1

NORMAL HYPERBOLIC PATTERN

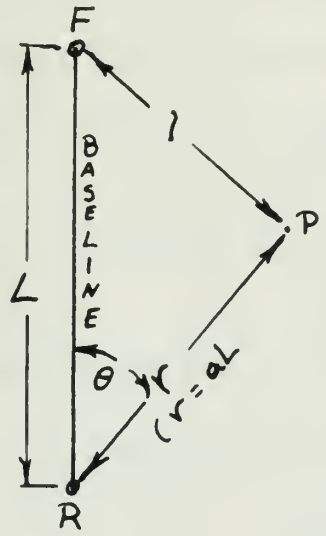

F - FIXED STATION

R - ROTATING STATION

L - BASELINE LENGTH

P - POINT (r, θ)

$a \equiv r/L$

FIGURE 2.2

COORDINATE SYSTEM

to p; arriving at time

$$t_2 = t + d + \frac{aL}{c} . \tag{3}$$

The time difference reading (T) will be $t_1 - t_2$.

$$T = \frac{L(1 - a + \sqrt{1 - 2a\cos\theta + a^2}) - d}{c}, \tag{4}$$

for any point (a,θ).

If it is desired to have T = 0 for a point (a,θ) on the trackline then,

$$d = \frac{L\,(1 - a + \sqrt{1 - 2a\cos\theta + a^2})}{c}. \tag{5}$$

2.2 Geometrical Accuracy

To determine the change in T for a small movement off the trackline along a radius from R, take the partial derivative of Equation 4 with respect to a. Note that d is a constant determined by Equation 5.

$$\frac{\delta T}{\delta a} = \frac{L}{c} \left(\frac{a - \cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1 \right) . \tag{6}$$

Rearranging and noting that $\delta T/L\delta a = \delta T/\delta r$, since $r = aL$,

$$c\,\frac{\delta T}{\delta r} = R.S. = \frac{a - \cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1. \tag{7}$$

This defines the radial sensitivity (R.S.), a nondimensional term. A dimensional term, Radial Divergence (R.D.) may be useful.

$$R.D. \equiv \frac{c}{R.S.} \quad \text{(ft. per us.)} \tag{8}$$

Figure 2.3 shows the locus for several values of Radial Sensitivity.

$$t_2 = \varepsilon + d + \frac{aL}{c} \,. \tag{3}$$

The time difference resulting (1) will be $t_2 - t_1$.

$$I = \frac{I_0(1 - a + \sqrt{1 - 2a\cos\theta + a^2})}{c} \,, \tag{4}$$

for any point (r,θ).

If it is defined to have $I = 0$ for a point (r,θ) on the wavefront then,

$$r = \frac{I_0 (1 - a + \sqrt{1 - 2a\cos\theta + a^2})}{c} \,. \tag{5}$$

5.2 Tangential Velocity

To determine the change in T for a small movement δr the wavefront along a radius from S, take the partial derivative of Equation 4 with respect to a. Note that c is a constant determined by Equation 5.

$$\frac{\delta T}{\delta a} = \frac{I_0}{c} \left(\frac{a - \cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1 \right) . \tag{6}$$

Interchanging and noting that $\delta T/\delta a = \delta T/\delta r$, since $r = aL$.

$$c \frac{\delta T}{\delta r} = \frac{I_0}{L} \left(\frac{a - \cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1 \right) . \tag{7}$$

This defines the radial sensitivity ($S.\delta.$), a coordinate-dependent term. A dimensional term, Radial Sensitivity ($S.\delta.$) may be useful.

$$S.\delta. = \frac{c}{S.\delta.} \quad \text{(In. per us.)} \tag{8}$$

Figure 2.) shows the lines for several values of Radial Sensitivity.

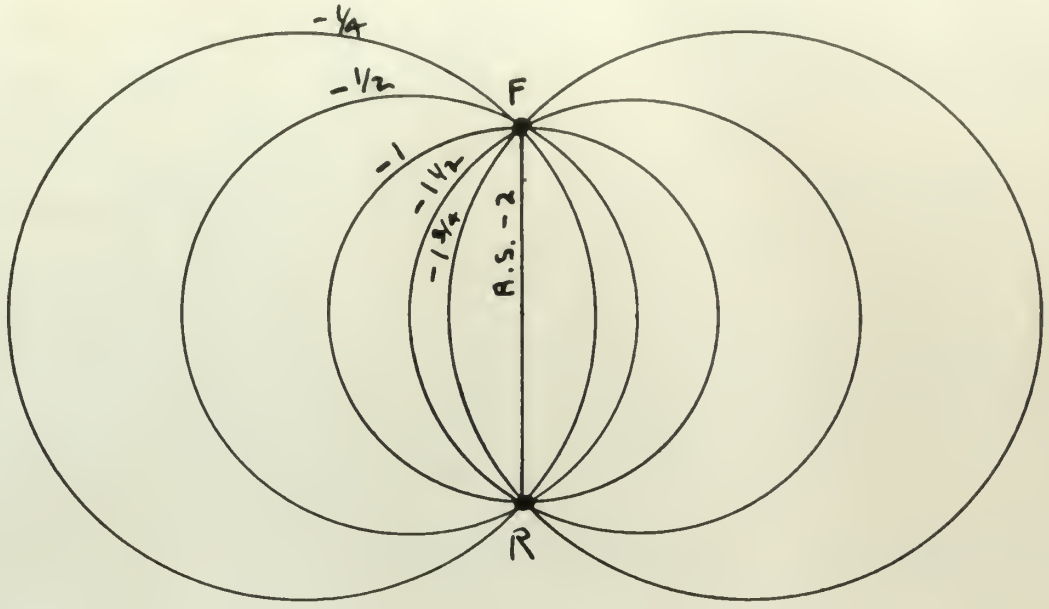

FIGURE 2.3

LOCI OF RADIAL SENSITIVITY

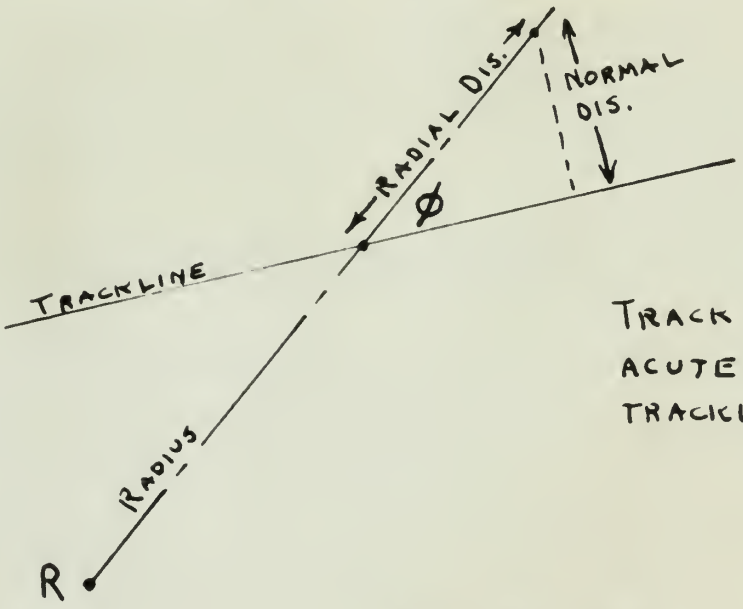

TRACK ANGLE (Ø) IS ACUTE ANGLE BETWEEN TRACKLINE AND RADIUS.

FIGURE 2.4

EFFECT OF TRACK ANGLE ON P.D.

The details of determination are in the Appendix. It can be shown that on the baseline the Radial Divergence will be 492 ft./us.; and that within a circle drawn with the baseline as a diameter (hereafter called the Baseline Circle), the maximum value will be 984 ft. /us.

The Radial Divergence gives the best indication of the expected geometrical accuracy for an arbitrary trackline. If the trackline is specified, a more significant figure is the distance normal to the trackline per microsecond of delay. This is expressed as the Pattern Divergence (P.D.). For an angle ϕ between radius and trackline,

$$P.D. = R.D. \sin\phi \text{ (ft./us.)} \qquad (9)$$

Figure 2.4 shows how this was obtained from Equation 8.

The Radial Divergence remains important in that it expresses the maximum value of Pattern Divergence independent of track angle.

It can be concluded that within the baseline circle the error, in distance normal to the trackline, will be less than 1,000 ft./us. error in time difference reading.

2.3 Factors Effecting Readable Accuracy.

It has been pointed out that the introduced delay will vary continuously with antenna rotation, and that the time delay received will vary over a range equal to the variation in d per beamwidth. The effect of this variation will depend on whether or not it is linear, and whether the indicator reads the average, the mean, or the extreme. The maximum effect would be to introduce an error equal to the variation in d for half a beamwidth. Let the error due to variation in d be e_d.

An equation is developed in the Appendix for e_d on the basis of linear variation of d with θ, and assuming the error to equal half the

variation of d per beamwidth.

$$e_d = \frac{d(d)}{d\theta} \quad \frac{B.W.}{2} \tag{10}$$

$$e_d = \frac{aL}{c}\left[\frac{\sin\phi}{\sqrt{1 - 2a\cos\theta + a^2}} + \left(\frac{a-\cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1\right)\cot\phi\right]\frac{B.W.}{2} \tag{11}$$

The range of variation in the delay for the complete pattern will effect the percentage accuracy required in the timer for a specified maximum error. Let this error be e_t.

The indicator will introduce an error which should be independent of system geometric parameters. Let this error be e_i.

The error in reading time difference will be the sum of these errors, and the error in distance off the trackline will be E, where

$$E = (e_d + e_t + e_i)\ P.D.\ (ft.) \tag{12}$$

In general, the range of variation of delay should be indicative of variations per beamwidth. To the extent that this is so, both e_d and e_t will be dependent on the range of variation of delay.

2.4 Location of Stations

The system equations should furnish some information to serve as a guide in choosing sites for the transmitting stations.

As the introduced delay is to be a function of θ, it is apparent that the trackline must not intersect any radius from the Rotating Station more than once.

Figure 2.3 shows how the transmitting stations should be located, with reference to the service area, for high valves of Radial Sensitivity.

$$\sigma_y = \frac{d\gamma}{d\varepsilon} \quad \text{for} \quad \varepsilon \ge \varepsilon_y \tag{10}$$

$$\sigma_y = \frac{\sigma_{max}}{\left[1 + 3\eta \cos^2\theta + \eta^2\right]^{\frac{1}{2}}} \left[\frac{\left(1 - \eta\cos\theta\right)}{\left(1 - \eta\cos\theta + \eta^2\right)^{\frac{1}{2}}}\right]^{\frac{1}{2}} \tag{11}$$

The radius of curvature in the strip in the negative Lateral axis after the penetrator completely departed or the time for a specified maximum error. Let this error be ε_y.

The tradeoff will influence an error which should be independent of system parameters particularly. Let this error be ε_y.

The error in reaching that difference will be the sum of these errors, and the error in distance at the condition will be ε_y where

$$E = (\varepsilon_y + \varepsilon_y + \varepsilon_y) \quad \text{for} \quad \varepsilon_y \tag{12}$$

In general, the error or variance of delay should be independent of variations per boundary. In the extent that this is so, will ε_y and ε_y will be dependent on the range of variation of delay.

5.0 Impedance of Stations

The system equations would further need information to serve as a guide to choosing cells for the transmitting stations.

In the following model to it be a function of θ, it is apparent that the resolution will not increase as system flow the indicating location more than once.

Figure 12 shows how the theoretical existing should be located, with reference to the initial view, for this value of radial inclination.

It has been shown that the values of d can be obtained from the normal hyperbolic pattern. It can be seen from Figure 2.1 that an attempt to keep the Pattern Divergence small by orienting the stations to give small track angles (as per Equation 9) would result in large variations in the introduced delay. The effect of this was discussed in connection with Equation 12. Although no positive connection between e_d and range of d has been made; it can be pointed out that P.D. is a function of $\sin\phi$ and has a finite limit, while $d(d)/d\theta$ is a function of $\cot\phi$ and has no limit. It seems desirable to keep the variation in delay at a minimum.

Topography will determine the extent to which theoretical requirements can be followed.

The following general rules should lead to a satisfactory positioning of stations:

1. No radius from the Rotating station can intersect the trackline more than once.
2. Include as much of the trackline as possible within the baseline circle.
3. The mean track should correspond as closely as possible to the perpendicular bisector of the baseline.

CHAPTER 3

APPLICATION OF THE PROPOSED NAVIGATIONAL SYSTEM TO BOSTON HARBOR

To give practical significance to the theoretical relations developed in the previous chapter, it is necessary to have specific values for the important variables. Boston Harbor is by no means typical of all harbors or restricted waters; the values determined for Boston Harbor will, however, be of a practical order of magnitude.

3.1 Determination of Parameters

3.1.1 Channel and Tracklines. Safe navigable tracklines were laid out on a Boston Harbor chart from the start of the dredged channel to Charlestown Navy Yard. These are shown on Figure 1.1.

The minimum width of the channel is 400 yards. For safe one way traffic it would seem desirable that the system give an indication of deviation from the track when the distance off is a maximum of 100 yards. For two way traffic the maximum allowable error would be 50 yards.

3.1.2 Location of Stations. Sites for the transmitting stations were selected in accordance with the relations determined in the previous chapter, insofar as topography would permit.

The Fixed Station as well as the Rotating Station was located to allow for line-of-sight transmission. Later development shows this is not an absolute requirement for the Fixed Station.

3.1.3 Data for Boston Harbor. Table I gives the essential data for the Boston Harbor system, determined for five degree increments of θ. More detailed data is given in Table III in the Appendix.

CHAPTER 3

Application of the Computer Model: Part 2, Motion Studies

In this chapter we discuss the theoretical relations developed in the previous chapter. It is necessary to have specific values for the dependent variables. Section three-A will be mainly theoretical or restricted natures; the various calculations for Section three-B will, however, be of a practical order of magnitude.

3.1 Determination of Coefficients

3.1.1 Control and Translation. Data variable inputs were laid out on a Gordon Barber sheet from the sheet w' the Tension Balanced to Station Map Tape. These are given in Figure 3.1.

The choices which, of the control is not simple. For part one was briefly it would seem desirable that the system give an indication of deviation from the desired when Graphs will be a maximum of 100 points. For two may briefly the maximum allowable error would be 30 points.

3.1.2 Limitation of Variables. Since the corresponding statistics were selected by inspection with the relations contained in the previous chapter, another is necessary should remain.

The Thorn Station is well as the Bowling Station was limited to allow for line-of-sight transmission. Later development modes this is not an absolute requirement for the final station.

3.1.3 Data for Gordon Burton. Table 1 gives the necessary data for the Boston Harbor System, calculated for five degree increments of θ. These detailed data is given in Table III in the Appendix.

TABLE I

θ	a	d	d/deg.	R.E.	R.D.	ϕ	P.D.
-90°	.535	47.3	.20	- .658	1497	60°	1293
-75	.520	46.3	.19	- .736	1336	66	1220
-70	.496	45.4	.18	- .838	1172	70	1100
-65	.480	44.5	.28	- .937	1050	82	1038
-60	.500	42.6	.35	- 1	984	77	959
-55	.510	41.0	.37	-1.078	914	70.5	861
-50	.530	38.9	.44	-1.146	851	67	790
-45	.553	36.6	.50	-1.213	811	61	708
-40	.582	33.9	.50	-1.275	771	56	639
-35	.602	31.6	.50	-1.354	726	69	677
-30	.627	28.9	.51	-1.433	686	67	632
-25	.648	26.5	.43	-1.519	648	84	645
-20	.656	24.6	.37	-1.638	601	81	594
-15	.665	22.8	.78	-1.762	558	88	556
-10	.665	21.8	.19	-1.882	522	87	521
- 5	.670	20.9	.19	-1.965	500	84	498
0	.680	19.90	.18	-2.00	492	78	482
5	.696	19.1	.2	-1.975	498	87	497
10	.695	20.1	.25	-1.857	530	89	529
15	.686	21.6	.37	-1.738	566	77	552
20	.673	23.8	.41	-1.615	609	80	600
25	.665	25.7	.35	-1.494	658	86	657
30	.666	27.3	.31	-1.371	716	89	716
35	.673	28.8	.18	-1.246	789	76	764
40	.691	29.1	.22	-1.120	879	69	820
45	.716	31.0	.32	- .987	997	64	895
50	.736	32.3	.33	- .880	1118	80	1100
55	.736	34.3	.41	- .806	1220	89	1220
60	.735	36.4	.42	- .738	1334	90	1334
	in.	us.	us./deg.		Ft/us.		ft/us.

Note that the maximum value of the Pattern Divergence is 1,334 ft./ microsecond. This means that the error in reading time delay must be limited to approximately 0.2 microseconds for one way traffic.

3.2 Specifications for Design of Equipment

3.2.1 Timer. The timer must be variable over the range from 18-48 microseconds. Simplicity in the timer is of secondary importance, so accuracy should be specified to practically eliminate it as a source of error. One tenth of the desired overall accuracy, or 0.02 us., should be adequate. Long time instability requiring monitored operation will be acceptable.

3.2.2 Transmitters and Antennas. The beamwidth from the Rotating station must be kept as small as possible. This requirement dictates that the frequency should be high in order to obtain a narrow beamwidth with an antenna of practical size. Use a frequency in the 3 cm. band as frequencies above this are effected to much by atmospheric conditions to be considered useable. Beamwidths of 0.1 degree can be obtained for microwave frequencies;[3] but considering that the antenna must be rotated, and perhaps at a fairly rapid rate, a specification of 0.5 degree beamwidth seems more practical.

The antenna should be rotated as fast as is practical, considering the physical problem, and the transient response of the timer and control, which must vary the delay with antenna rotation.

The frequency for the Fixed transmitter should be such that a steep leading edge can be maintained without requiring unreasonable bandwidth in the receiver. It should also be at a frequency which will permit good rejection of signals in the 3 cm. band. The antenna should be omnidirectional or broad enough to cover the entire service area.

3.3 Specifications for Radio or Telegraph

3.3.1 Time. The time must be variable over the basic 12-hr micro-second. Capability to the tiker is of secondary importance, so accuracy should be specified to practically eliminate it as a source of error. The depth of the desired overall accuracy, or 0.2% or., should be adequate. Long time instability requiring constant operation will be acceptable.

3.3.2 Transmitters and antennas. The bandwidth from the locating station must be kept as small as possible. This requirement dictates that the frequency should be high in order to obtain a narrow bandwidth with an antenna of practical size. Use a frequency of the 3 mc. band or frequencies above this are allowed to such by atmospheric conditions to be considered usable. Resolution of 0.1 degree can be obtained for microwave frequencies, but considering that the antenna must be rotated, and passage at a fairly rapid rate, a specification of 1.5 degree bearings were more practical.

The antenna should be rotated as fast as is practical, considering the physical problem, and the bandwidth response of the timer and receiver, which must vary the delay with antenna rotation.

The frequency for the fixed transmitter should be such that a steep leading edge can be maintained without requiring unreasonable bandwidth in the receiver. It should also be at a frequency which will permit good reflection of signals in the 3 mc. band. The antenna should be omni-directional or broad enough to cover the entire service area.

The power required from both transmitters will be dependent on the receivers used; it should be kept in mind that it is desirable to have the receivers as simple as possible.

Pulse widths and pulse repetition rate will be dependent on the type of indicator used.

3.2.3 Receiver. The receiver must have one channel, either broad band or automatically tuned, to receive signals in the 3 cm.band. The other channel should be tuneable to the frequency of the Fixed Station.

Receiving antennas for both channels should be broadband and omni-directional.

Both channels should have sensitivity, and automatic gain control which will produce output signals of fairly constant amplitude for signal strengths experienced anywhere in the service area. Bandwidths must be sufficient to produce sharp leading edges on the output signals.

3.2.4 Indicator. The total allowable error has been specified as 0.2 us. The timer error has been specified as 0.02 us. The maximum variation in delay per beamwidth for Boston Harbor is 0.25 which can introduce a maximum error of 0.13 us. Therefore the indicator error must be less than 0.05 us. This accuracy must be maintained when signals from the Rotating Station are received once per revolution, and the spread in delay of signals received is 0.25 us.

CHAPTER 4

EXPERIMENTAL EVALUATION OF SPECIFICATIONS

The experimental procedure as outlined in Chapter 1 was divided into two phases. The first phase was Test of Critical Components with the RF. link.

4.1 Test of Critical Components Without RF Link

4.1.1 Timer Construction. The specifications as outlined in Chapter 3 required accuracy for the variable time delay in the order of 0.01 us. Although timers with this accuracy could be easily constructed with normal commercial practice, such a timer was not available for use in these experiments. Therefore, a simple phantastron circuit was built with design adapted from the ranging circuit of the SU radar. The range of time delay in this circuit was from 30 us. to 56 us. or 36 us. The delay potentiometer was a ten-turn heliopot. The dial on the heliopot was graduated in degrees. With ten-turns of 360 degrees each, the 36 us. variation in delay was divided into 3,600 parts. The resultant calibration was for 0.01 us. per degree of shaft rotation. With this simple circuit, the specified timer accuracy was easily obtainable. To balance the 20 us. minimum in the variable delay, a fixed delay was constructed to facilitate further tests.

4.1.2 Indicator Patterns. This study was made to determine best indicator pattern. The set-up used is shown by Figure 4.1. Both pulses are applied to vertical deflection plates, and the sweep is triggered from the first pulse received. Various pulse widths for Fixed and Rotating stations were studied with various ratios of pulse amplitude. The results

Chapter 5.0

Alternative 2: Single Flood Control Reservoir

The alternative 2 proposal is similar to Alternative 1 but contains some new features. The first change was the deletion of the Ft. Lincoln.

5.1 Plan of Original Development Without Ft. Lincoln

5.1.1 Flood Characteristics. The specifications as outlined in Chapter 3 required protection for the Mandan flow equal to the capacity of 2.22 cfs. Already flowing into this reservoir would be nearly completed with minimal commercial provision, and a study was initiated for use in these comparisons. Therefore, a single reservoir design was still with design adopted from the original alternate of use by Mandan. The reach of this delay to this channel was from 20 cfs. to 50 cfs. to 50 cfs. The delay permissible for a recharge recharge. The flow at the beginning was provided to Mandan, this reservoir of 320 channels only, 20 to 50. retarding to delay was flowing into 3,000 cfs. The flooding objective was for 1.0 cfs. per degree of delay reduction. This main flood control objective was mainly satisfactory. To relieve the 20 cfs. deficit to the original 50 cfs., a flood delay was overlapped to Mandan Higher level.

5.1.2 Inadequate Reference. This study was made to determine real hydrologic patterns. The method used is shown by Figure 5.1. This values are applied to regional modification plotted, and the range is determined from the first pulse received. Various pulse stages the flood and Rockville stations were studied with various values of pulse magnitude. The results

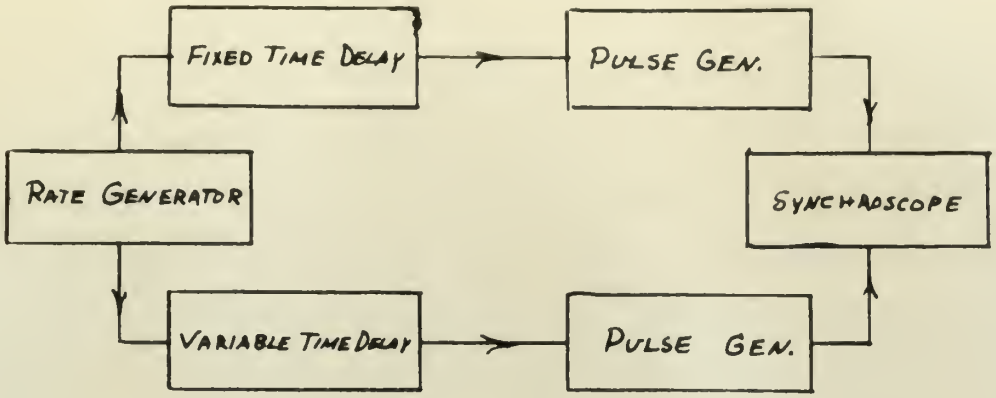

FIGURE 4.1

SIMPLIFIED DIAGRAM FOR CRITICAL COMPONENT TEST WITHOUT THE R.F. LINK

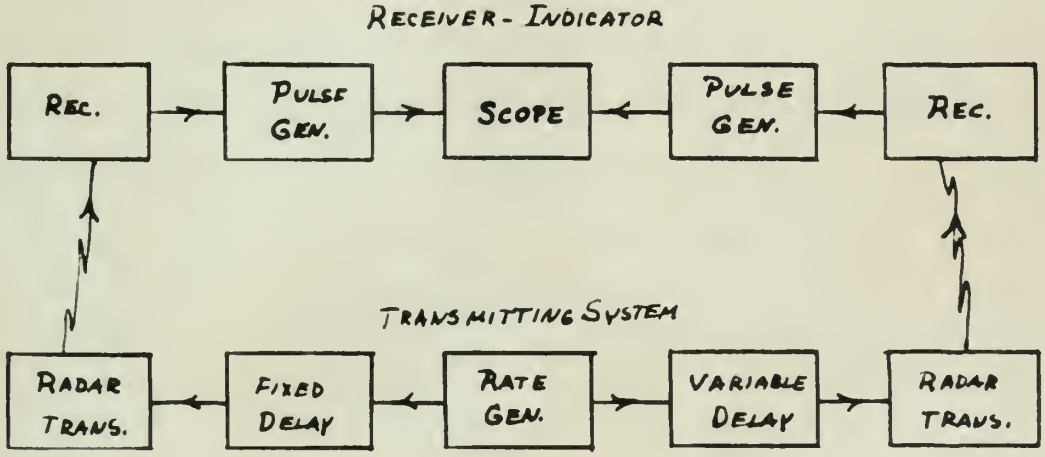

FIGURE 4.2

SIMPLIFIED DIAGRAM FOR CRITICAL COMPONENT TEST WITH THE R.F. LINK

of these tests indicated that the Fixed station pulse length should be slightly greater than the total variation in time delay expected within the coverage area. For Boston Harbor, this length should be about 4.0 us. The Rotating station pulse length should be about 2.0 us. In our previous discussions, we have considered that T = 0. In order to facilitate matching, it is convenient to make T = constant = $\frac{1}{2}$ maximum variation of d, for all points in the coverage area. This is consistent with previous theory. With this type of presentation, the condition for matching was the condition where the center of the pulses of the two stations coincided. This type of matching is difficult to achieve because of difficulty in equalizing lengths of Fixed station pulse extending beyond the ends of the Rotating station pulse. Further, this type of matching is undesirable because pulse distortion at the transmitter and in the receiver is such that the sharp trailing edge of the signal is lost. This distortion makes matching of pulse centers difficult, if not impossible, without the use of auxiliary pulse generators in the receiver for each station.

Another type of matching which would utilize only the leading edges of pulses could be described as follows:

(1) The signal from the Fixed station is received and triggers the sweep on the indicator.

(2) The Rotating station signal is applied to the vertical deflection plates of the indicator scope, and, in the matched condition, appears with its leading edge at the center of the sweep.

(3) The sweep length for operation in Boston Harbor should be about 4 us.

Tests with this type of indicator showed that average error in matching

was about one degree of shaft rotation on the timer. This corresponds to a timer-indicator accuracy of 0.01 us. This accuracy is slightly better than that obtainable with matching of pulse centers, and eliminates the need for one of the auxiliary pulse generators in the receiver. In order to obtain the proper video presentation it is necessary to have in the receiver either an extremely linear sweep with graduations on the scope face, or a crystal oscillator to provide marks on the sweep.

4.1.3 Effect of Spread. The causes of spread in time difference have been discussed in detail in earlier sections. In order to simulate this spread in static tests, a sinusoidal voltage was impressed on the timer so that the resultant time delay varied about the time delay set by potentiometer shaft. Matching of time difference was again accomplished as detailed above. Results of this test, (tabulated below) showed that (e_1 e_t) increased with increase in spread.

Continuous Signals without R.F. Link:

Spread	Error	
-0-	0.7°	0.007 us.
0.5 us.	0.8°	0.008 us.
1.0 us.	1.3°	0.013 us.

The precise functional relationship between spread and error cannot be formulated with this limited data. However, the order of magnitude is significant.

4.1.4 Effect of Sampled Data. In order to simulate intermittent receipt of signals from the rotating station, a key was placed in the trigger line of the Rotating station pulse generator. The key was closed at a rate corresponding to the rotation rate which might be expected in the

final system. Extreme rates studied were 12 and 240 signals per minute. Error with high repitition rates was about the same as errors with continuous signals, and increased very slightly with rates as low as 60 per minute. As the rate was decreased beyond this point, error increased sharply. Results of test with varying Pulse Recurrence Rate from Rotating Station; sp.. d, constant, at 0.5 us:

P.R.R.	Error	
Continuous	0.8°	0.008 us.
180-240/min.	1.1°	0.011 us.
60/min.	1.1°	0.011 us.
12/min.	2.4°	0.024 us.

It can be concluded that repition rate should be kept as high as possible, but that rates as low as 60 per minute give acceptable results.

4.2 Test of Critical Components with RF Link

The second phase of the experimental work was conducted with an array of equipment indicated by Figure 4.2.

The equipment was set up for determination of the accuracy obtainable along the baseline. In previous work--derivation of equations-- we related the accuracy anywhere in the pattern to the accuracy on the baseline. Therefore, a test along the baseline, would test the accuracy obtainable anywhere in the coverage area of the system. In the first sequence of tests a constant time delay was set on the timer. The receiver unit was moved back and forth along the baseline, until the time difference was zero. The receiver was then moved off of the zero time difference point and returned to the indicated zero time difference point. The distance between successive indicated zero time difference

points was a measure of the accuracy with which a specified time delay would determine a position along the base line. The second part of the RF test was to vary the introduced time delay, leaving the receiver in the same position. The time delay was manipulated until a zero time difference was indicated. This test was intended to give reciprocal results to the first tests. The correlation of data obtained in these two tests would be a measure of the accuracy of reading obtainable along the baseline with the RF link.

The first part of this test indicates that maximum distance errors obtained from receiver movement were of the same order of magnitude as errors introduced by other system components. Results of this test are not significant in themselves.

The second part of the test showed that the value of $(e_i + e_t)$ with continuous signals was approximately 0.03 us. probable with the R.F. link. No spread was introduced, but instability of system components caused a spread of approximately 0.5 us. This instability would not be expected in components designed for this use, but was fortuitous in this test.

4.3 Evaluation of Experimental Results

The essence of the experimental tests is evaluation of the quantity $(e_i + e_t)$, with spread, intermittent signals, and the all essential system components.

The probable error $(e_i + e_t)$ through all system components but with continuous signals was 0.03 us. The effect of sampled data was shown to be negligible in comparison to this value for rotation rates of interest. The quantity e_t was found to be negligible. The causes of e_i were distributed throughout system components, and might be reduced in components designed for use in the system.

CHAPTER 5

DISCUSSION OF RESULTS AND CONCLUSIONS

The contributions which have been made toward the development of "A Microwave, Direction-Modulated Hyperbolic Navigational System" can be best presented by summarizing the results which will be generally applicable, illustrating the application of the general results to a particular situation, and then evaluating the resulting system.

5.1 Summary of General Results

Criteria for selection of station sites have been set forth in Chapter 2. After the stations have been located, the values of required introduced delay can be determined by Equation 5. Equation 12 can be used to determine the system error in terms of the timer error (e_t), the indicator error (e_i), and the error due to the variation in introduced delay per beamwidth (e_d). Equation 8 can be used to obtain data for plotting the direction-modulated hyperbolic pattern.

Geometrical relations in a particular application determine the variation in delay per degree of rotation of the Rotating station antenna. With the type of indicator selected (see Chapter 4), the operator determines the mean of extreme values of time delay received. For a linear variation of d with θ within a beamwidth, the mean value will equal the actual value at the center of the beam. Thus e_d is introduced by non-linearity of d vrs. θ. The value of e_d will be the difference between the mean value and the actual value. Values of e_d can be determined from a plot of d vrs. θ. (see Figure 5.1). Significant non-linearity can be expected where the trackline changes direction, and where the trackline

CHAPTER 5

CONCLUSIONS AND RECOMMENDATIONS

The application which has been made toward the development of a [illegible] theoretical-observational approach can be most promoted by examining its results will be [illegible] applicable, illustrating the application of the general results in a particular situation, and then examining the resulting system.

5.1 Summary of Theoretical Results

Briefly the interaction of various waves have been set forth in Chapter 2. After the statistics have been located, the values of required ionospheric delay can be determined by equation 5. Equation 12 can be used to determine the system error in terms of the timer error (σ_T^2), the indicator error (σ_I^2), and the error due to the variation in the introduced delay per transmit (σ_D^2). Equation 8 may be used to obtain data for plotting the correction-modified hyperbolic pattern.

Geometrical variations in a particular application determine the variation in delay over degree of rotation of the location station. With the type of variable antennas (see Chapter 4), the operator determines the mean of various values of time delay received. For a timer whose its mean of various values of time delay received. For a timer variation of 0 $\pm$ [illegible] a transmitter, the mean value will equal the actual value at the center of the beam. Then σ_T^2 is introduced by uncertainty of 0 rms. R. The value of σ_T^2 will be the difference between the mean value and the actual value. Values of σ_T^2 can be determined from a plot of 0 rms. R. (See Figure 5-1). Ionospheric non-linearity can be computed where the transmitter location, and where the [illegible]

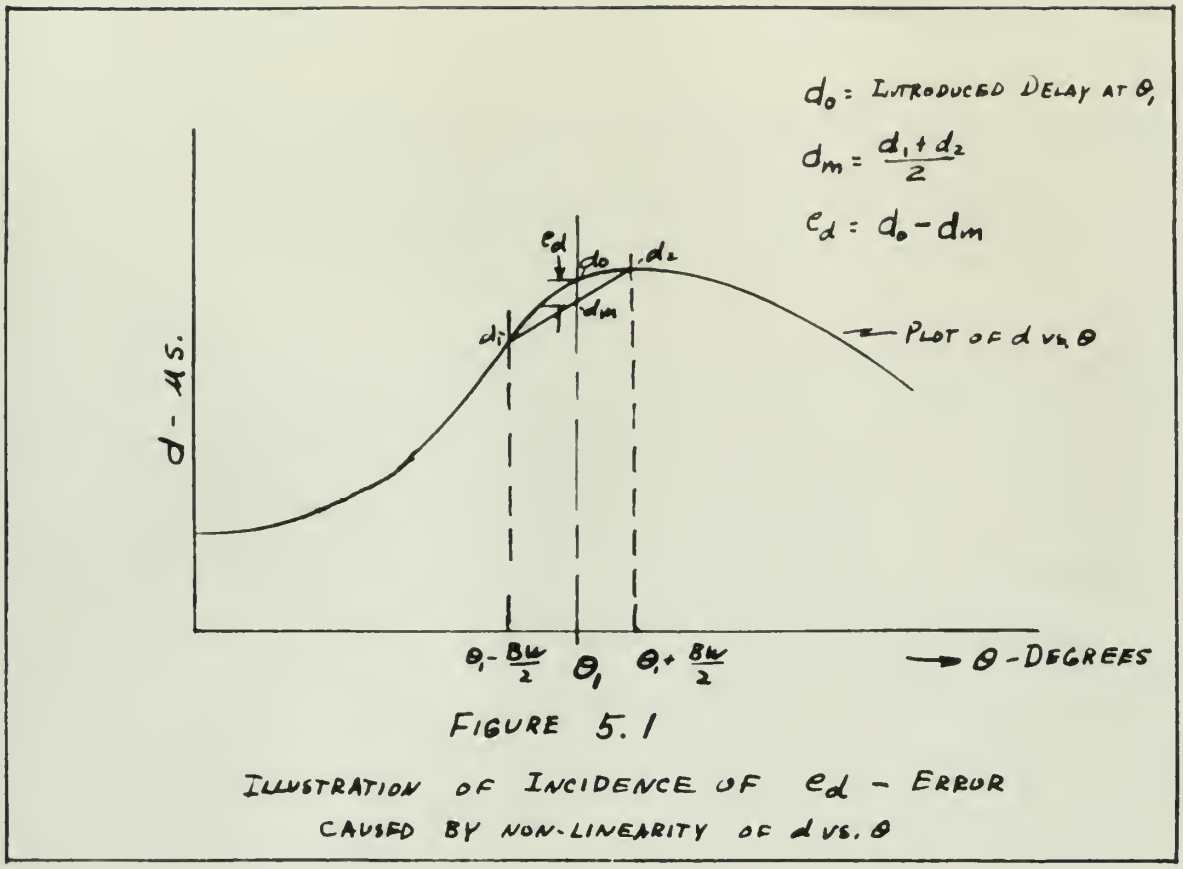

FIGURE 5.1

ILLUSTRATION OF INCIDENCE OF e_d - ERROR CAUSED BY NON-LINEARITY OF d VS. θ

becomes tangent to the normal hyperbolic pattern.

5.2 Determination of Timer and Indicator Errors

The quantity e_i is the error in reading time delay through the complete system when e_t and e_d are zero. Its value will depend on equipment components, the spread of signals caused by variation of d per degree, the sweeplength of the presentation, the rate of antenna rotation, and the beamwidth.

The value of e_i must be determined experimentally. It is convenient and almost necessary to include the timer in the test and determine $(e_i + e_t)$. An experiment similar to the test of R.F. link in Chapter 4 could be used.

The spread in d to be introduced for the experimental test should be the maximum variation in d per beamwidth, as determined by a plot of d vrs. θ. The sweeplength of the indicator should be such that for any position in the channel, the signal and entire spread of signals would appear on the trace. From inspection of the plot of the direction-modulated hyperbolic pattern, the maximum value of T within the channel can be determined. The maximum variation of d for half a beamwidth can be determined from a plot of d vrs. θ. The sweeplength should be twice the sum of these values. The antenna rotation can be simulated by gating the trigger to one transmitter at a rate equal to the rate of antenna rotation, and with a gate width equal to the time required for the antenna to turn through a beamwidth.

A point by point analysis could be made for e_i based on the actual spread. Due to the rather indefinite dependence, it is considered better to take the value for the maximum spread and consider it as constant.

become longest in the normal hyperbolic pattern.

3.4 Determination of Lobe and Tolerance Sectors

The quantity σ_f is the error in reading time delay between the two plate system when σ_f and σ_g are zero. The value will depend on equipment components, the speed of signals caused by variation of d per degree, the sweeplength of the presentation, the rate of antenna rotation, and the bandwidth.

The value of σ_f must be determined experimentally. It is convenient and almost necessary to include the timer in the test and determine $(\sigma_f - \sigma_g)$. An experiment similar to the test of S.V. link in Chapter 4 could be used.

The spread in d to be introduced for the experimental test should be the maximum variation in d per bandwidth, as determined by a plot of d vrs. θ. The sweeplength of the indicator should be such that for any position in the channel, the signal and entire spread of allowable would appear on the trace. From inspection of the plot of the direction-modulated hyperbolic patterns, the maximum value of T within the cleared can be determined. The maximum variation of d for half a bandwidth can be determined from a plot of d vrs. θ. The sweeplength should be twice the sum of these values. The antenna rotation can be simulated by getting the trigger to the transmitter at a rate equal to the rate of antenna rotation, and with a pulse width equal to the time required for the antenna to turn through a bandwidth.

A point by point analysis could be made for σ_f based on the actual spread. Due to the rather unidentifiable dependence, it is considered better to take the value for the maximum spread and consider it as constant.

5.3 Practical Results

The procedure outlined in the previous sections was developed as a result of all theoretical and experimental work done. Consequently it was not followed exactly in applying the system to Boston Harbor; the same essential information was, however, obtained.

The location of stations and determination of geometric relations for Boston Harbor was discussed in Chapter 3. The maximum value of P.D. was 1,334 ft./us.

To determine the maximum system error, Equation 12 need be evaluated only at the points where P.D. is maximum, and where e_d is significant in the summation of $(e_t + e_i + e_d)$.

By the experimental procedure discussed in Chapter 4, $(e_t + e_i)$ was found to be $\pm$ 0.03 us. For Boston Harbor e_d became significant at only one point. It was 0.025 us. where P.D. was 497 ft./us. For this point E is 27.4 ft. Therefore:

$$E_{max} = (e_t + e_i)\ P.D._{max}$$

$$E_{max} = 0.03 \times 1,334 = 40 \text{ ft.}$$

5.4 Conclusions

5.4.1 Accuracy for Boston Harbor. For quick and easy determination of time delay, it is felt the probable error based on the figure of .03 us. for $e_t + e_i$) is a bit optimistic. Reference to Figure A.6.2 shows that a time difference of 0.1 us. is readily apparent. Based on this more conservative figure:

$$E_{max} = 0.1 \times 1,334 = 133.4 \text{ ft.}$$

With this accuracy the system could be used to permit two-way traffic in a 400 yd. channel. Ships could stay at least 50 yards from the edge

5.3 Practical Results

The procedure outlined in the previous sections was developed as a result of all theoretical and experimental work done. Unfortunately it was not followed exactly in applying the systems to Boston Harbor; the same essential information was, however, obtained.

The location of stations and determination of geometric relations for Boston Harbor was discussed in Chapter 3. The maximum value of P_{ij} was 1.33% ft./va.

To determine the maximum system error, Equation 12 need be evaluated only at the points where P_{ij}, is maximum, and where σ_d is significant in the magnitude of $(\sigma_i + \sigma_j + \sigma_d)$.

By the experimental procedure discussed in Chapter 4, $(\sigma_i + \sigma_j)$ was found to be ± 0.03 va. For Boston Harbor σ_d became significant at only one point. It was 0.05% va. where P_{ij} was 90% ft./va. For this point E is 27.4 ft. Therefore:

$$E_{max} = (\sigma_i + \sigma_j)\ P_{ij\,max}$$

$$E_{max} = 0.03 \times 1.33\% = .40 \text{ ft.}$$

5.4 Conclusions

5.4.1 Accuracy for Boston Harbor. For quick and easy determination of time delay, it is felt the probable error based on the figure of .03 va. for $(\sigma_i + \sigma_j)$ is a bit optimistic. Reference to figure 4.6.2 shows that a time difference of 0.1 ms. is readily expected. Based on this more conservative figure:

$$E_{max} = 0.1 \times 1.33\% = 133.4 \text{ ft.}$$

With this accuracy the system could be used to permit two-way traffic in a 400 ft. channel. Ships could stay at least 50 yards from the edge

of the channel, and passing ships would be separated by at least 100 yards.

5.4.2 Extension of Application. In considering extension of the application of this system, several points should be mentioned.

The error e_d can be ignored in determination of maximum system error on the basis that transmission could be stopped for the few narrow sectors where it would be of consequence.

The beamwidth is not as critical as it originally appeared to be. Its effect on e_d has been discounted, and the figure of 0.03 us. for $(e_t + e_i)$ was obtained with a spread of signals of about 0.5 us., which would be the maximum for Boston with a one degree beamwidth.

The effects of both spread and sampled data were small compared to the increase in $(e_t + e_i)$ with the introduction of the R.F. link. It therefore appears that the equipment was the primary factor in determing the value of 0.03 us. for $(e_t + e_i)$. Equipment specifically designed for use in this system could probably decrease this error.

Ease of rapid determination of time delay (consideration of which dictated increasing the time error to 0.1 us.) will be almost directly proportional to sweeplength.

For any installation where stations can be located to keep the desired service area within the baseline circle; a 4 us. sweep would be sufficient, the maximum P.D. would be 964 ft./us., and system error could be limited to less than 100 ft. This would permit safe two-way traffic in a 400 yard channel.

5.4.3 Suggested Improvements. Unfortunately the time delay reading will not be proportional to distance off the trackline throughout the service area, because of variations in P.D. The system could be modified to

indicate the two edges of the channel, and safety of position could be more readily determined.

Another possible improvement would be to alter the signal from the Rotating station at several points in the rotation; this could provide indication of progress along the channel.

CHAPTER 6

RECOMMENDATIONS FOR FUTURE DEVELOPMENT

In development of the system to this point, it has been assumed that the timer can be controlled by antenna rotation to provide the proper variation of d with θ. Since the timer error was found experimentally to be negligible, this assumption seems justified. However, design of a delay control mechanism is essential to the operation of an actual system. This design problem was not studied. One type of mechanism might be a cam on the antenna shaft with ordinates proportional to required delay at each angle. The cam follower would drive a linear time delay potentiometer in a circuit similar to that of Figure A.3. Other mechanisms might be devised using electronic means only. The details of design for this component should be studies in future development.

Experimental results indicate that, if a control mechanism can be developed, a pilot installation is warranted to test the system under actual operating conditions.

The nature of the signals used in the system suggests the possibility of automatic presentation of position by a meter indicating "on channel", or "left" or "right" of channel. An extension of this type of presentation is readily seen in application of the meter signal to an automatic steering device.

CHAPTER 4

CONCLUSIONS AND FUTURE DEVELOPMENT

In development of the system to this point, it has been assumed that the array can be controlled by antenna rotation to provide the proper variation of θ. Since the laser servo and input capabilities be negligible, this assumption seems justified. However, design of a delay control mechanism is essential to the operation of an actual system. This design problem was not studied. One type of mechanism might be seen on the antenna shaft with switches proportional in required delay at each angle. The rotary feedback would drive a linear time delay potentiometer in a circuit similar to that of figure 4.3. Other combinations might be devised using electronic means only. The details of design for this component should be studied in future development.

Experimental results indicate that, if a control mechanism can be developed, a phase modulation is warranted to last the system under actual operating conditions.

The nature of the circuit used in the system supports the possibility of automatic presentation of position by a meter indicating "on channel", "left" or "right" of channel. An extension of this type of presentation is readily seen in application of the meter signal to an automatic steering device.

APPENDIX

APPENDIX

A.1 Summary of Symbols and Equations

a.....Nondimentional distance r/L
Baseline.....Line between transmitting stations
BASELINE CIRCLE..Circle drawn with the baseline as a diameter
B.W. .....Beamwidth
c.....Velocity of light
d.....Introduced delay
E.....System probable error in feet
e_d.....Error between indicated time difference and actual time difference, in microseconds.
e_i.....Probable error in reading indicated time difference, in microseconds
e_t.....Probable timer error in microseconds
F.....Fixed station
L.....Baseline length
P.D. .....Pattern Divergence
R.....Rotating station
r.....Distance from the Rotating station to a point
R.D. .....Radial Divergence
R.F. Link.....Inclusion of transmitter and receiver
T.....Time difference
Track angle.....Acute angle between trackline and radius from R
us. .....Microsecond(s)
θ.....Angle between the baseline and a radius from R to a point
ϕ.....Track angle
δ.....Partial derivative

(5).....$d = \frac{L(1 - a\sqrt{1 - 2a\cos\theta + a^2})}{c}$

(7).....$c\frac{\delta T}{\delta r} = R.S. = \frac{a - \cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1$

(8).....$R.D. = \frac{c}{R.S.}$

(9).....$P.D. = R.D. \sin\phi$

(12).....$E = (e_d + e_t + e_i)P.D.$

Glossary

1.1 Glossary of Symbols and Definitions

Boundary Layer Thickness
Displacement Thickness
Momentum Thickness
Energy Thickness
Shape Factor
Skin Friction Coefficient
Reynolds Number
Pressure Gradient Parameter
Velocity Profile Parameter
Pressure Coefficient
Free Stream Velocity
Velocity Components
Cartesian Coordinates
Polar Coordinates
Kinematic Viscosity
Density
Dynamic Viscosity
Shear Stress
Wall Shear Stress
Pressure
Body Force
Gravitational Acceleration
Time
Stream Function
Velocity Potential

(1) ..... δ = [illegible]

(2) ..... $\delta^* = \int_0^{\delta} \left(1 - \frac{u}{U_e}\right) dy$

(3) ..... $\theta = \int_0^{\delta} \frac{u}{U_e}\left(1 - \frac{u}{U_e}\right) dy$

(4) ..... $H = \frac{\delta^*}{\theta}$

(5) ..... $\delta^* = \theta H$

(6) ..... $\delta^* = \theta H$

(7) ..... $\frac{dp}{dx} = \rho U_e \frac{dU_e}{dx}$

(8) ..... $\tau_w = \mu \left(\frac{\partial u}{\partial y}\right)_{y=0}$

(9) ..... $\tau_w = \frac{1}{2} \rho U_e^2 C_f$

(10) ..... $C_f = f(H, Re_\theta)$

4.2 Loci of Radial Sensitivity

Figure 2.3 showing the loci of various values of Radial Sensitivity was based on the following manipulation of Equation 7, which stated:

$$R.S. = \frac{a - \cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1$$

Rearrange with $(a - \cos\theta)$ on the right side, and square both sides:

$$(R.S.^2 + 2R.S. + 1)(1 - 2a\cos\theta + a^2) = a^2 - 2a\cos\theta + \cos^2\theta$$

$$(R.S.^2 + 2R.S.)a^2 - 2\cos\theta(R.S.^2 + 2R.S.)a + (R.S. + 1)^2 - \cos^2\theta = 0$$

$$a = \cos\theta \pm \sqrt{\cos^2\theta - \frac{(R.S. + 1)^2 - \cos\theta}{(R.S.^2 + 2R.S.)}}$$

$$a = \cos\theta \pm \sqrt{\frac{(R.S. + 1)^2(\cos^2\theta - 1)}{R.S.^2 + 2R.S.}}$$

$$a = \cos\theta \pm \frac{R.S. + 1}{\sqrt{-(R.S.^2 + 2R.S.)}} \sqrt{1 - \cos^2\theta}$$

$$a = \cos\theta \pm \frac{R.S. + 1}{\sqrt{-(R.S.)^2 - 2R.S.}} \sin\theta$$

Let $\frac{R.S. + 1}{\sqrt{-(R.S.)^2 - 2R.S.}} = K$, then

$$a = \cos\theta \pm K\sin\theta.$$

Converting to rectangular co-ordinates,

$$\frac{}{\sqrt{x^2 + y^2}} = \frac{x}{\sqrt{x^2 + y^2}} \pm \frac{Ky}{\sqrt{x^2 + y^2}} .$$

$$x^2 + y^2 = x + Ky$$

$$x^2 + y^2 - x - Ky = 0$$

This is a standard form of a circle[4] with center at $(\frac{1}{2}\ \frac{K}{2})$ and radius of $\frac{1}{2}\sqrt{1 + K^2}$. The distance from the center to the origin will be $\frac{1}{2}\sqrt{1 + K^2}$ so the circle passes through the origin.

Translated back to polar co-ordinates, as defined originally in Figure 2.2, the loci will be a circle passing through both stations, with center on the perpendicular bisector of the baseline a distance $\frac{K\lambda}{2}$ from the baseline.

Note that for R.S. = -1, K = 0 so the locus will be a circle with the baseline as a diameter. (This is substantiated by letting R.S. = -1 in Equation 7. The result is a = cos0.) Continuous use of positive values of square roots may be corrected for with the following stipulations:

1. For values of R.S. numerically greater than one the locus will be that part of the locus circle within the baseline circle.
2. For values of R.S. numerically less than one the locus will be that part of the locus circle outside the baseline circle.

TABLE II

R.S.	K/2
-2	∞
-1.5	-.288
-1.0	0
-0.5	+.288
-0.25	+.568

A.3 Derivation of equation for e_d.

Under certain conditions e_d is equal to one-half the variation in d per beamwidth, or

$$e_d = \frac{d(d)}{d\theta} \frac{B.W.}{2} . \qquad (10)$$

Equation

$$d = \frac{L(1 - a + \sqrt{1 - 2a\cos\theta + a^2}}{c} ,$$

is valid for points on the trackline, so a must be a function of θ. Therefore:

$$\frac{d(d)}{d\theta} = \frac{\partial d}{\partial \theta} + \frac{\partial d}{\partial a} \frac{da}{d\theta} . \qquad (14)$$

$$\frac{\partial d}{\partial \theta} = \frac{aL}{c} \frac{\sin\theta}{\sqrt{1 - 2a\cos\theta + a^2}}$$

$$\frac{\partial d}{\partial \theta} = \frac{L}{c} \left(-1 + \frac{-\cos\theta + a}{\sqrt{1 - 2a\cos\theta + a^2}} \right)$$

From Figure A-1, it can be seen that

$$\frac{da}{d\theta} = a\cot\phi$$

Combining the above as per Equations 10 and 14,

$$e_d = \frac{aL}{c} \left[\frac{\sin\theta}{\sqrt{1 - 2a\cos\theta + a^2}} + \left(\frac{a - \cos\theta}{\sqrt{1 - 2a\cos\theta + a^2}} - 1 \right) \cot\phi \right] \frac{B.W.}{2} . \qquad (11)$$

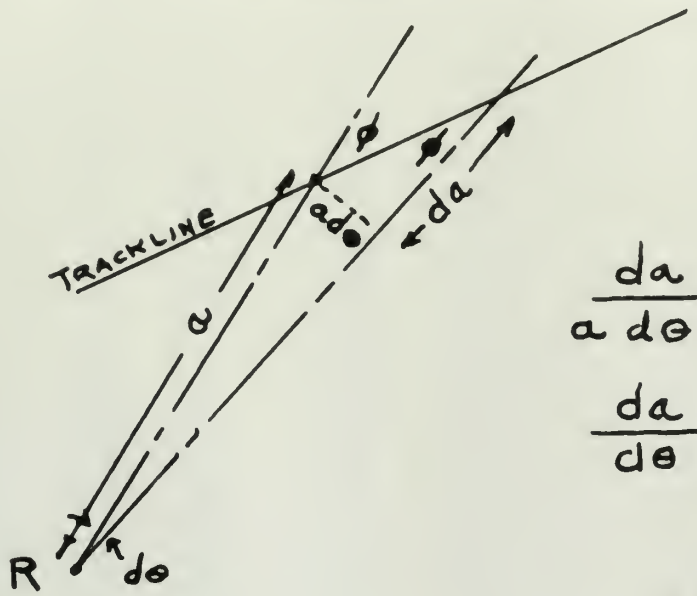

$$\frac{da}{a\,d\theta} = \cot\phi$$

$$\frac{da}{d\theta} = a\cot\phi$$

FIGURE A.1

DETERMINATION OF $da/d\theta$

A.4 Detail Data for Boston

TABLE III

θ	aL	a	cosθ	$\sqrt{1-2a\cos\theta+a^2}$	d	d/deg.	R.S.	R.D.	ϕ	P.D.
-80	7.90	.535	.174	1.050	47.3	.20	- .658	1497	60°	1293
-75	7.56	.520	.256	1.002	46.3	.19	- .736	1336	66	1220
-70	7.31	.496	.342	.952	45.4	.18	- .838	1172	70	1100
-65	7.22	.480	.423	.908	44.5	.28	- .937	1050	82	1038
-60	7.36	.500	.500	.866	42.6	.35	- 1	984	77	959
-55	7.52	.510	.574	.822	41.0	.37	-1.078	914	70.5	861
-50	7.81	.530	.643	.775	38.9	.44	-1.146	851	67	790
-45	8.15	.553	.707	.724	36.6	.50	-1.213	811	61	708
-40	8.59	.582	.766	.669	33.9	.50	-1.275	771	56	639
-35	8.89	.602	.819	.614	31.6	.50	-1.354	726	69	677
-30	9.25	.627	.866	.552	28.9	.51	-1.433	686	67	632
-25	9.55	.648	.906	.497	26.5	.43	-1.519	648	84	645
-20	9.67	.656	.940	.445	24.6	.37	-1.638	601	81	594
-15	9.80	.665	.966	.395	22.8	.78	-1.762	558	88	556
-10	9.80	.665	.985	.363	21.8	.19	-1.882	522	87	521
- 5	9.88	.670	.996	.338	20.9	.19	-1.965	500	84	498
0	10.01	.680	1	.319	19.90	.18	-2.00	492	78	482
5	10.26	.696	.996	.303	19.1	.2	-1.975	498	87	497
10	10.25	.695	.985	.338	20.1	.25	-1.857	530	89	529
15	10.12	.686	.966	.379	21.6	.37	-1.738	566	77	552
20	9.92	.673	.940	.434	23.8	.41	-1.615	609	80	600
25	9.81	.665	.906	.487	25.7	.35	-1.494	658	86	657
30	9.82	.666	.866	.540	27.3	.31	-1.371	716	89	716
35	9.93	.673	.819	.594	28.8	.18	-1.246	789	76	764
40	10.20	.691	.766	.623	29.1	.22	-1.120	879	69	820
45	10.56	.716	.707	.707	31.0	.32	- .987	997	64	895
50	10.86	.736	.643	.772	32.3	.33	- .880	1118	80	1100
55	10.85	.736	.574	.835	34.3	.41	- .806	1220	89	1220
60	10.84	.735	.500	.898	36.4	.42	- .738	1334	90	1334
					us/dg	ft/dg.		ft/us.		ft/us.

L = 14.75 in (on chart) = 30,729 ft.

$$d/deg = \frac{d(\theta + 5) - d(\theta - 5)}{10}$$

c = 984 ft/us.

Table 113

0	at	s	dist	[illegible]	t	slope	L.S.	L.s.	L	c.s.
10	7.99	.12	.174	1.000	174	.80	+ .098	1407	800	1172
15	7.36	.210	.230	1.000	404	.45	- .758	1372	60	1320
20	7.72	.890	.780	.720	84.4	.42	- .034	1172	70	1260
25	7.22	.800	.620	.901	84.2	.80	- .027	1079	80	1208
30	7.36	.360	.700	.856	81.1	.35	- .2	998	77	979
35	7.52	.310	.774	.888	80.8	.37	-1.070	918	76.5	882
40	7.12	.229	.840	.715	79.4	.44	-1.344	831	87	790
45	8.11	.173	.707	.754	77.1	.39	-1.213	771	84	708
50	8.39	.320	.744	.809	73.4	.50	-1.272	711	94	639
55	8.80	.400	.811	.814	71.1	.41	-1.324	705	98	677
60	9.15	.447	.866	.932	84.1	.34	-1.403	868	87	823
65	9.15	.464	.868	.897	80.1	.48	-1.312	844	84	849
70	9.47	.459	.946	.849	84.1	.37	-1.308	841	31	794
75	9.80	.402	.858	.903	83.1	.78	-1.408	538	88	756
80	9.78	.404	.847	.903	77.1	.13	-1.408	922	87	721
85	9.78	.379	.848	.735	80.1	.13	-1.408	900	84	858
90	10.01	.000	1	.329	77.10	.18	-1.00	1008	78	886
95	10.00	.394	.944	.908	12.1	.5	-1.373	1008	87	987
100	10.53	.403	.989	.906	75.1	.14	-1.387	910	89	1289
105	10.12	.368	.908	.879	83.1	.17	-1.123	1048	77	1236
110	9.98	.373	.896	.818	83.1	.16	-1.443	1100	89	1260
115	9.75	.000	.868	.807	75.1	.31	-1.008	1028	86	1217
120	9.88	.810	.900	.540	82.1	.13	-1.373	734	89	1241
125	9.81	.093	.903	.594	88.1	.18	-1.444	789	78	1264
130	10.20	.382	.962	.863	82.1	.13	-1.113	879	84	1310
135	10.34	.711	.707	.720	77.0	.24	- .887	997	84	1193
140	10.00	.734	.667	.775	78.1	.73	- .884	1112	80	1200
145	10.07	.738	.677	.823	78.1	.50	- .801	1200	89	1244
150	10.04	.735	.750	.858	79.0	.08	- .738	1178	90	1234

wt/de ft/de. ft/ma. lb/ma.

I = 16.75 in (or close) = 36,750 cr.

$$d/dep = \frac{s(a + r) - r(a - r)}{12}$$

a = 90% ft/de.

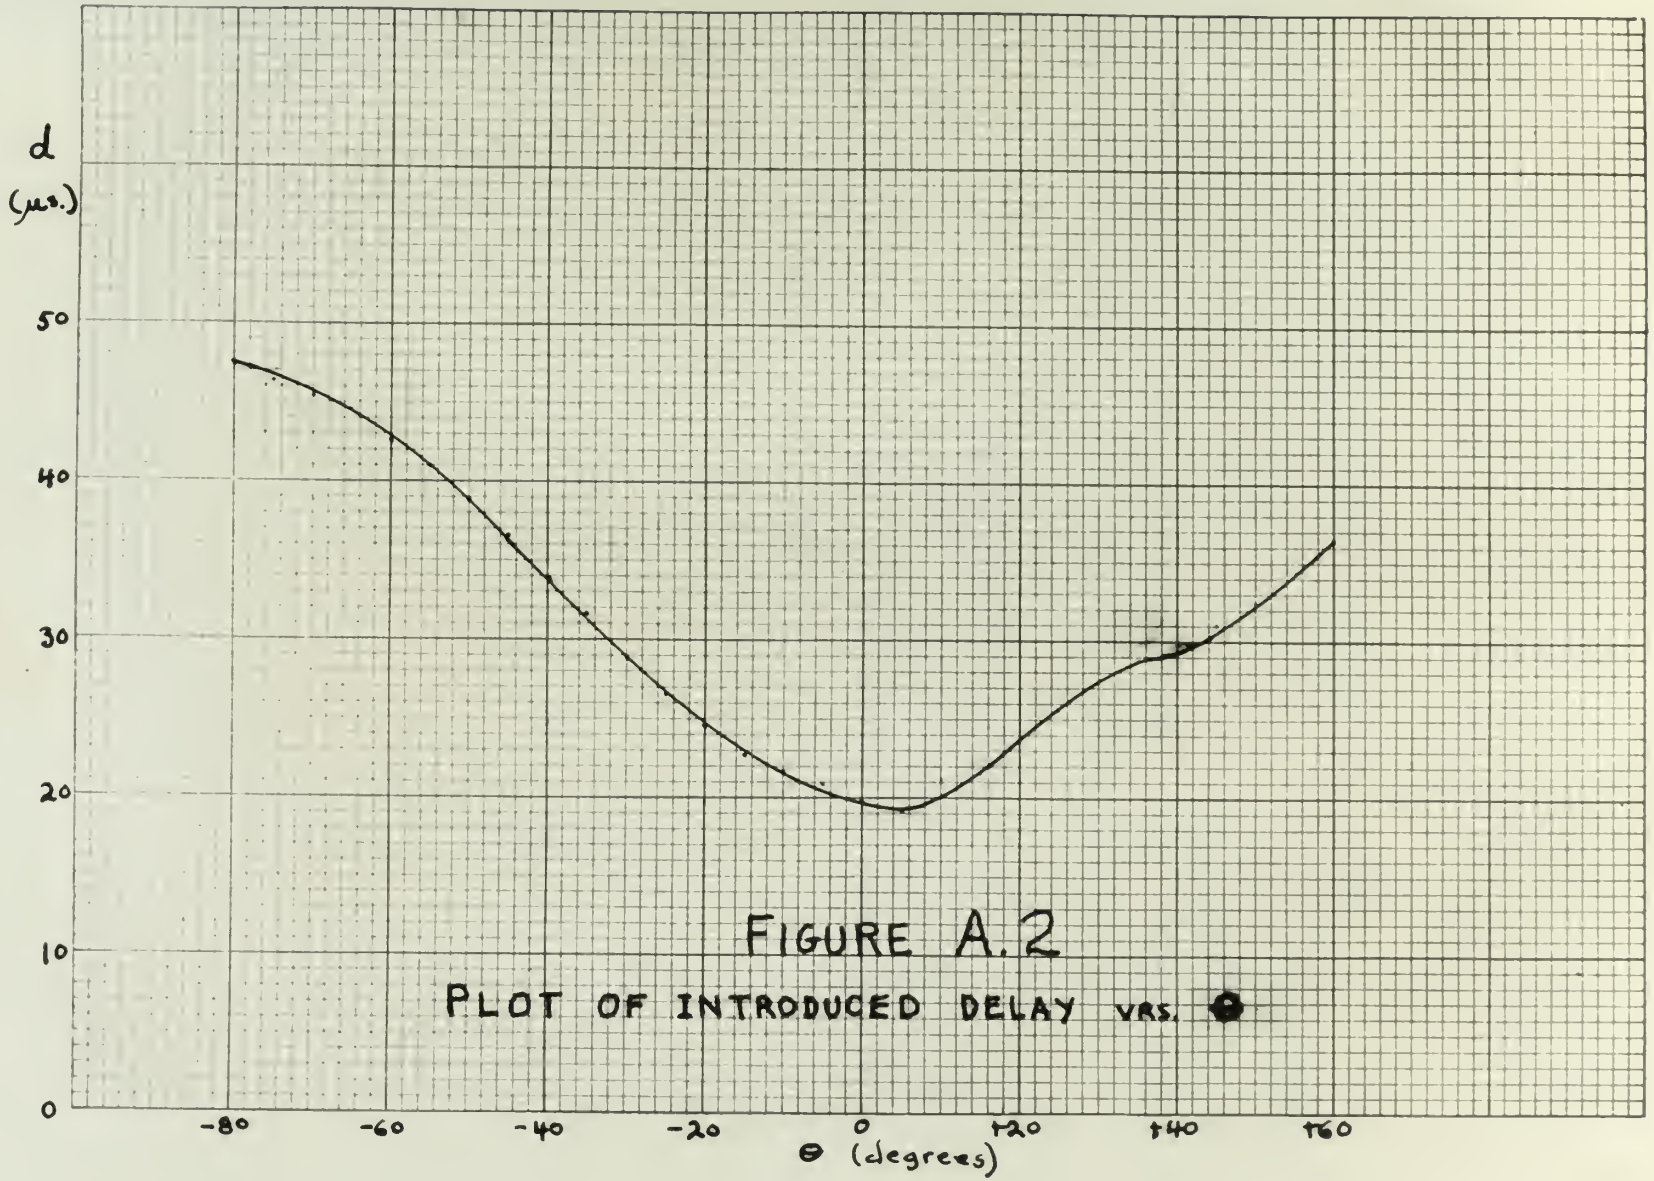

FIGURE A.2

PLOT OF INTRODUCED DELAY VRS. θ

4.5 Details of Experiments

This section will include a description of equipment used in, and raw data obtained. Procedures followed to obtain data, and analysis of data to arrive at conclusions is in the body of the report.

Test of Critical Components Without the R.F. Link

Data, items 1-5, were obtained to determine timer-indicator accuracy under ideal conditons, to calibrate the variable time delay, and to determine best indicator pattern for presentation. Items 6-11 were obtained to determine effects of various factors on accuracy.

Test of Critical Components With the R.F. Link

Data, items 1, 2 were obtained to find accuracy of position determination by the system. Items 3 were obtained to determine overall errors of system with the R.F. Link.

4.3 Optimization Considerations

This section will discuss a description of enjoyment used by the new data structure. Procedures followed to obtain data, and analysis of data to arrive at conclusions is the body of the report.

Part of Optimal Processing Without the B.C. Link

Data, items 1-5, were obtained to determine time-indicator recovery under least conditions. In evaluating the response time delay, and to determine best indicative points for presentation. Items 6-13 were obtained to determine effects of various factors on accuracy.

Test of Optimal Processing With the B.C. Link

Data, items 1,2 were obtained to find recovery of pertinent data-elements by the system. Items 3 were obtained to determine overall errors of system with the B.C. Link.

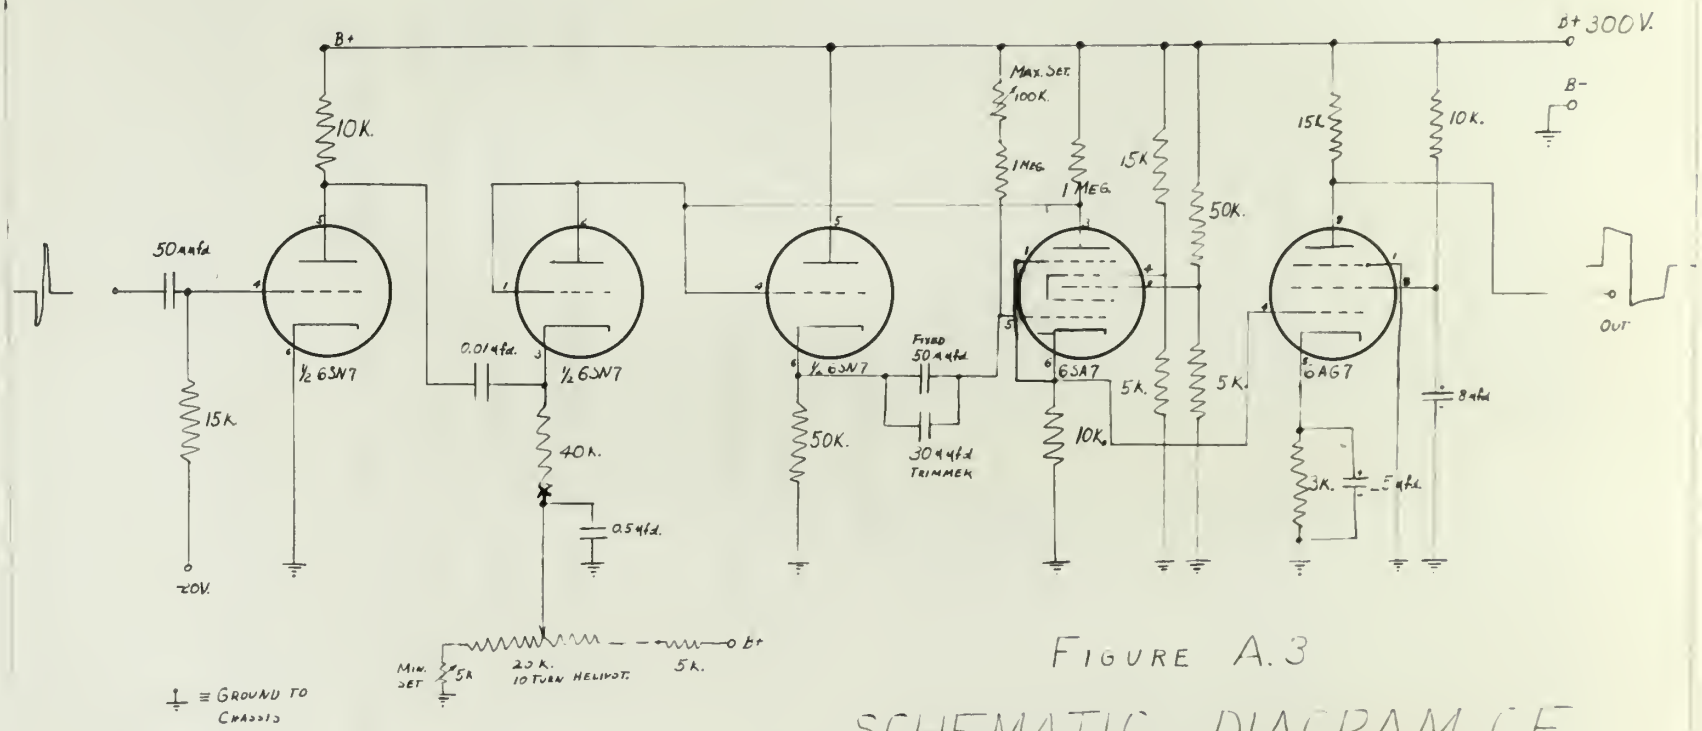

FIGURE A.3

SCHEMATIC DIAGRAM OF VARIABLE DELAY

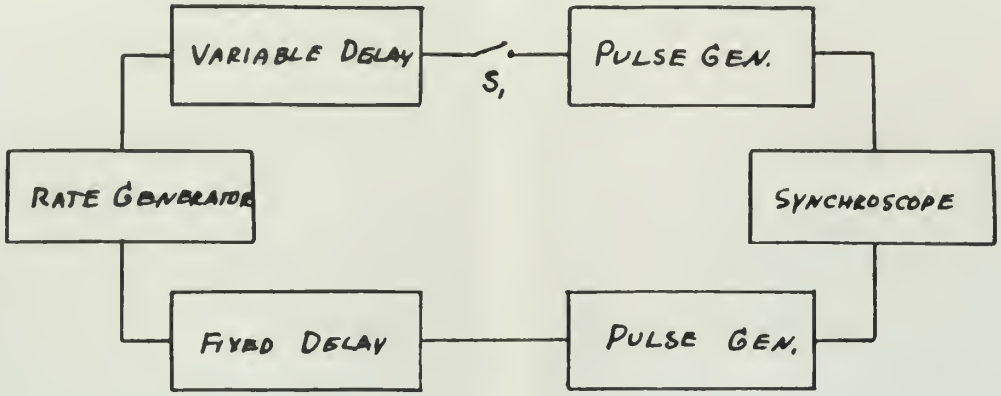

FIGURE A.4

DIAGRAM OF EQUIPMENT USED FOR TEST NO.1 (WITHOUT R.F. LINK)

RATE GEN. AND SYNCHROSCOPE - TEKTRON, TYPE 513D

PULSE GENERATORS - HEWLETT PACKARD, MOD. 212A

FIXED DELAY - BUILT INTO PULSE GENERATORS

VARIABLE DELAY - CONSTRUCTED FROM DIAGRAM, FIG. A.3

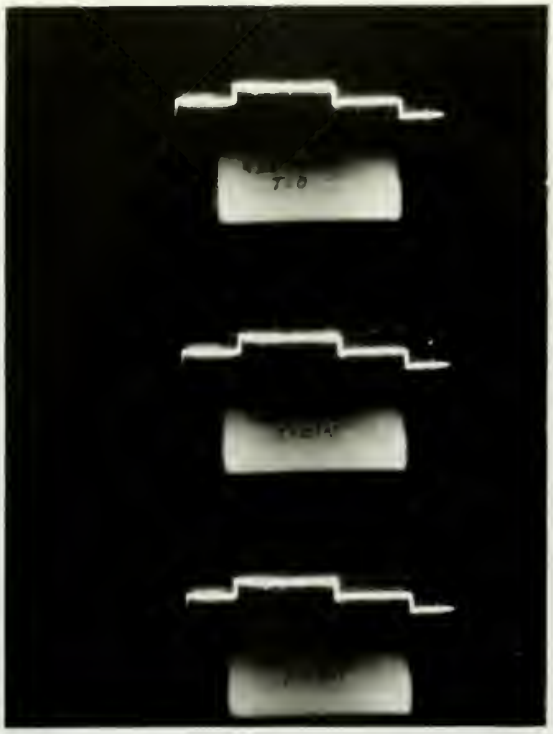

Fig. A.5.1

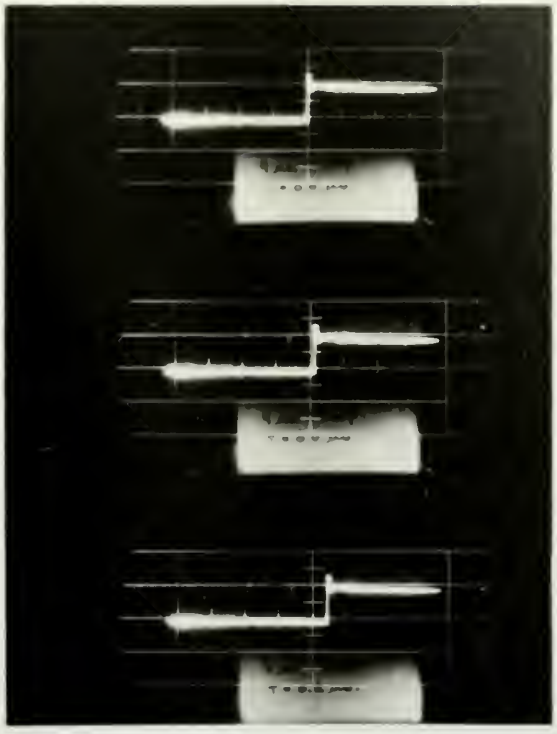

Fig. A.5.2

FIGURE A.5 Types of Indicator patterns.

Figure A.5.1 shows the type of pattern presented by superposition of pulses fromm the pulse gensrators. The first pulse received triggers the sweep, and also appears on the sweep. Pulse lengths were 2 us. and 4 us. respectively. Conditions shown are for T= 0, T = 0.1 us. , and T = 0.2 us.

Figure A.5.2 shows the pattern when the sweep is triggered by the first pulse, and the second pulse only appears on the sweep. Time delay conditions are the same as for Fig. A.5.1

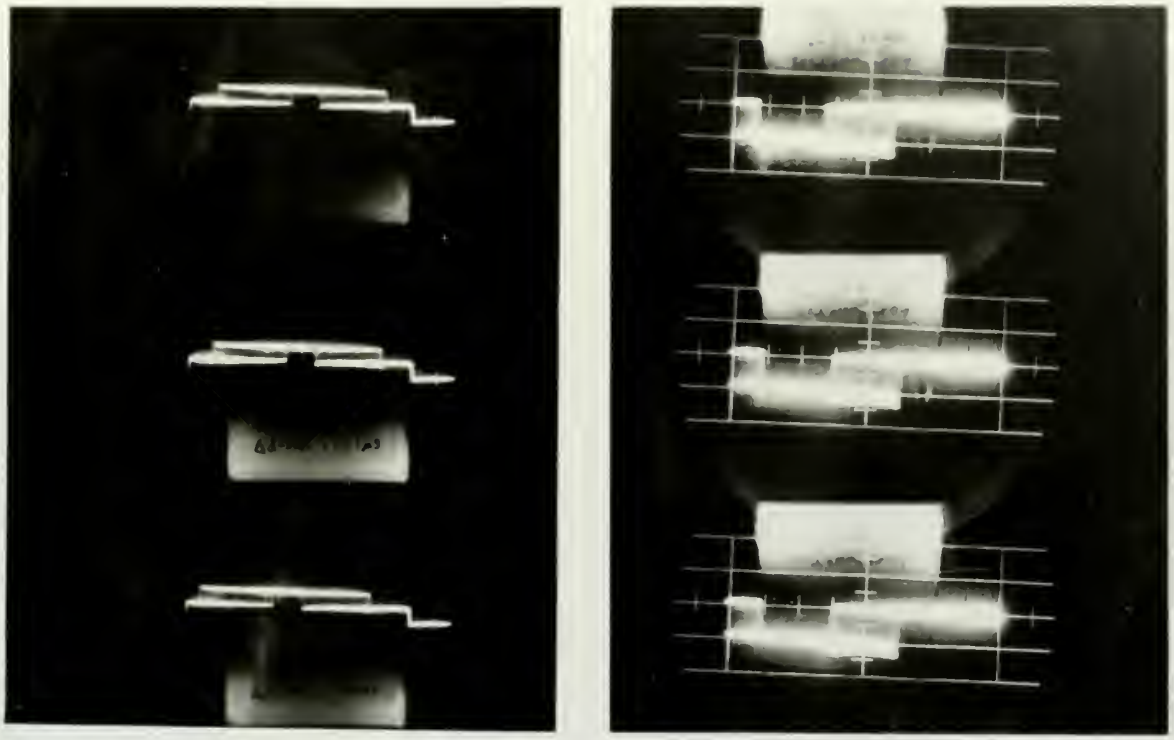

FIGURE A.6

COMPARISON OF INDICATOR PATTERNS WITH SPREAD

In each picture above, the value of T is shown at zero, 0.1 us., and 0.2 us. In both types of presentation, it is readily apparent that a missmatch of 0.1 us. can be seen at a glance. With care this accuracy might be improved. These observations are highly significant, since they confirm the conclusions stated, that probable overall system error will be 0.1 us.

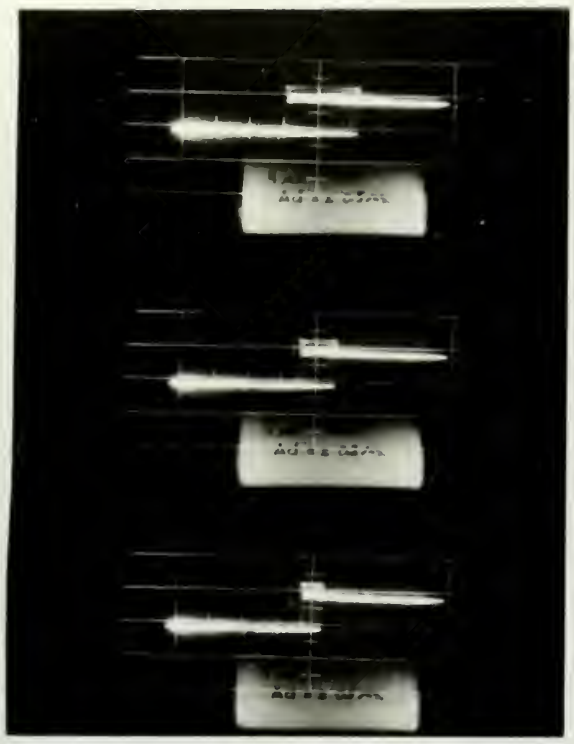

Figure A.7.1

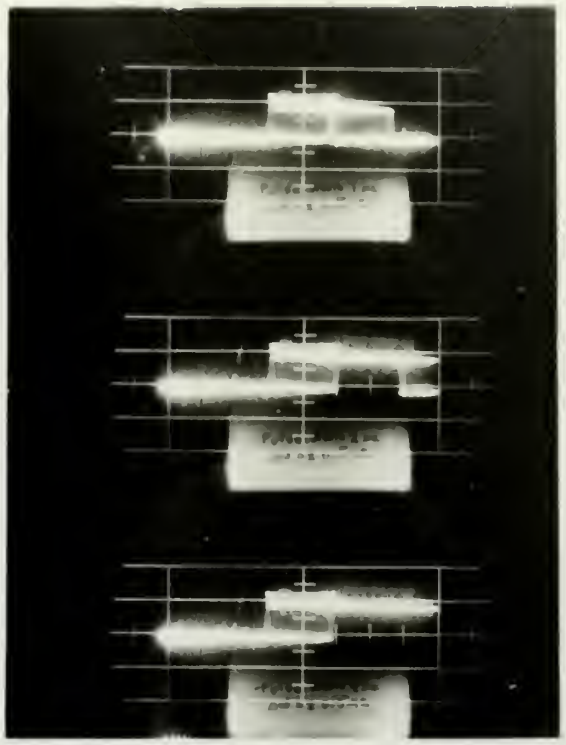

Figure A.7.2

FIGURE A.7

Effects of Pulse Length and Spread

Figure A.7.1 shows the picture obtained with a spread of 0.5 us., 0.2 us., and 0.1 us. Figure A.7.2 shows the effect of pulse length on the Step-Type of indication. Here it is apparent that the pulse length of the Rotating Station signal should be as long as the maximum spread plus the maximum channel width in us. in order to avoid ambiguity in interpretation of the received signal. Pulse lengths of 1 us., 2 us., and 4 us. are shown with a constant spread of 0.5 us.

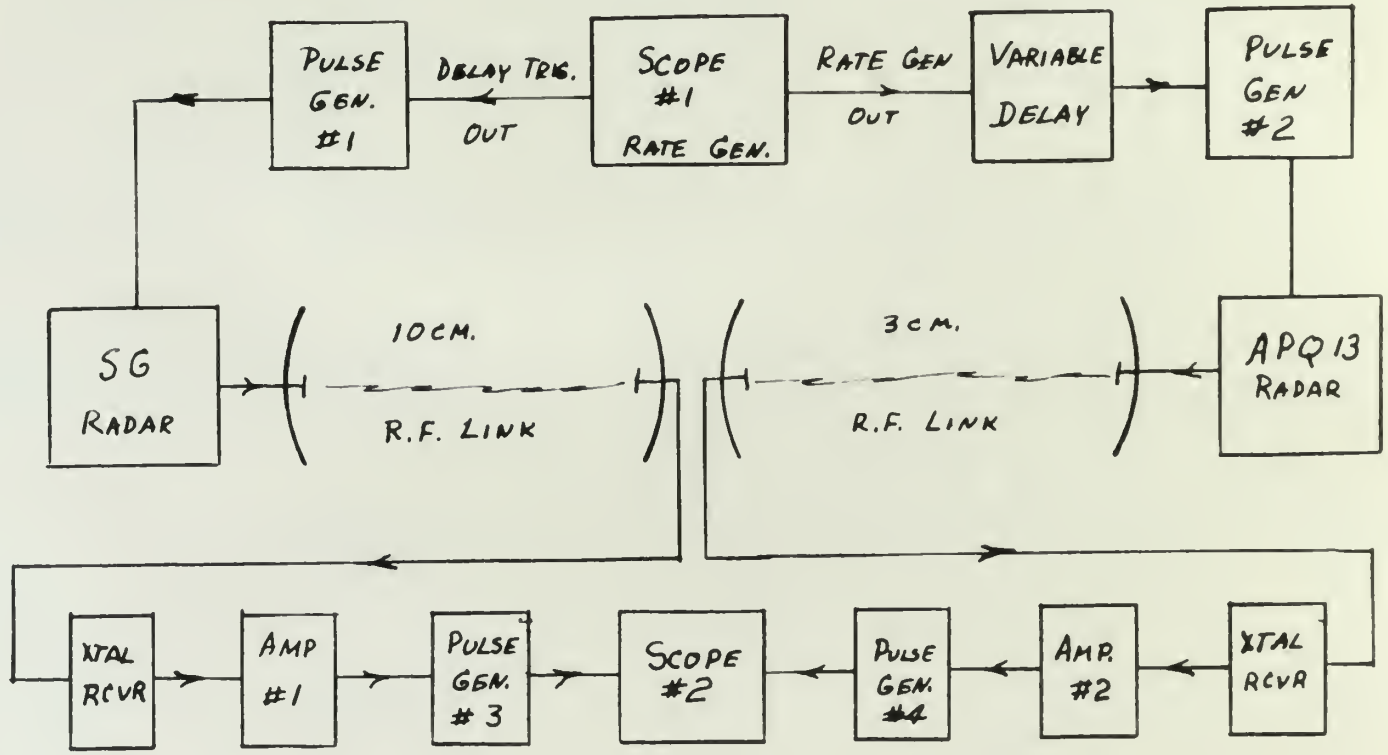

FIGURE A.8

DETAILS OF EQUIPMENT

TEST 2. (WITH R.F. LINK)

NOTE: EXPLANATION ON FOLLOWING PAGE

EXPLANATION OF FIGURE A.3

Scope #1.....Textron, Type 513D

Scope #2.....TS - 34/AP (on 5 us. sweep)

Pulse Gen. #1....Meas. Corp. Model 79B

Pulse Gen. #2....Gen. Radio, Type 869A

Pulse Gen. #3....Hewlett Packard, Model 212A

Pulse Gen. #4....Hewlett Packard, Model 212A

Amp. #1.....Hewlett Packard, Model 4000 (60db gain)

Amp. #2.....Hewlett Packard, Model 4000 (60db gain)

Note #1.....Trigger taken to pins 3 & 6 of V-401 in SG Modulation Gen. Unit (with V-401 removed)

Note #2.....Trigger taken to terminal #16 on modulator unit of APQ 13.

Note #3.....Voltage probe placed in SG waveguide. Cable leads to connector in coaxial feed

CONSOLIDATED RAW TEST DATA - WITHOUT R.F. LINK

Continuous signals, no spread, P.R.R. = 2,000 per sec.
Constant delays were set on "fixed" delay and matched by rotation of Variable Delay Potentiometer

1. Pulses from Fixed and Rotating Pulse Gen. Same Amplitude & Same Width

Test	A	B	C	D	
	137	143	144	140	Width and Height of
Settings	136	141	143	142	Pulse Resulting from
	138	143	142	141	superposed pulse
	-	-	(136)	-	were maximized

Probable Error 0.54° = 0.0054 us.

2. Pulse Widths Ratio = 1; amplitude Ratio = 2

Test	A	B	
	137	137	Height of resultant
Settings	137	138	pulse maximized
	137	137	
	137	138	

Probable Error 0.384° = 0.0384 us.

3. Pulse width ratio = 2; amplitude Ratio = 1

Test	A	B	C	D	
	102	99	102	102	Pulse centers are
Settings	102	100	101	102	superposed
	102	99	100	102	
	101	99	101	102.5	

Probable Error 0.54 = 0.0054 us.

4. Pulse width Ratio = 1.1; Amplitude Ratio = 1

Test	A	B	
	117.5	117	Pulse centers
Settings	118	115	superposed
	117	117	
	117.5	117.5	

Probable Error 0.384° = 0.00384 us.

5. Pulse width Ratio = 1.1; Amplitude Ratio = 2

Test	A	B	C	D	
	116.5	114.0	114.0	114.0	Pulse Centers
Settings	116.0	113.5	115.0	114.0	superposed
	116.0	114.5	114.0	114.0	
	116.0	114.0	114.0	114.0	

Probable Error 0.18° = 0.0018 us. 0.384° = 0.00384 us

The Following tests were Conducted with P.R.R. = 5,000/sec.

6. Pulse width Ratio = 2; Amplitude Ratio = 1, Spread = 0.75 us.

Test	A	B	C	
	20	26	25	Pulse centers
Settings	23	23	30	Superposed
	20	26	28	
	26	20	28	
	20	25	27	

Probable Error 1.3° = 0.013 us.

C - Intermittent Signals 2/sec or 120/min.

7. Step Type Indication: No Spread; continuous Signals

Test	A	B	
	195	195	Step Centered on
	195	196	Sweep
	194	196	
	195	197	
	196	196	

Probable Error 0.68° = 0.0068°

8. Step Type Indication: Spread = 0.5 us.; Continuous Signals

Test	A	B
	169	170
Settings	170	171
	172	172
	172	170
	172	170

Probable Error 0.8° = 0.008 us.

9. Step Type Indication: Spread = 1.0 us.; Continuous Signals

Test	A	B
Settings	71.0	66.0
	73.0	67.0
	68.0	67.0
	70.0	69.0
	67.0	69.0

Probable Error 1.3° = 0.013 us.

10. Step Type Indication: Spread = 1.2 us.; Continuous Signals

Test	A	B
Settings	62.0	56.0
	64.0	57.0
	65.0	53.0
	66.0	53.0
	66.0	52.0

Probable Error 1.3° = 0.013 us.

11. Step Type Indication: Spread = 0.5 us.; Continuous Signals

Test	A	B	
	240.0	238.0	Sweep Length 8 us.
	245.0	240.0	
	246.0	242.0	
	245.0	238.0	
	243.0	237.0	

Probable Error 1.4° = 0.014 us.

CONSOLIDATED RAW DATA FOR TEST OF CRITICAL COMPONENTS
WITH I.F. LINK

1. Receiver 52 feet from 10 cm. and 64 feet from 3 cm.

Test	A	B	
Shaft	105.0	105.0	Match obtained by manipulation of potentiometer
	100.0	107.0	
Settings	97.0	105.0	
	105.0	101.0	
Degrees	103.0	103.0	

Probable Error 2.03° = 0.0203 us. = 10.0 feet

2. Time delay set on timer, receiver repeatedly moved for match

Test	A	B
Distance,	23.0	40.0
	13.0	32.0
Feet from	18.5	27.0
	14.5	53.0
10 cm.	16.5	36.5

Probable Error 6.71 feet = 0.014 us.

3. Receiver Stationary, Potentiometer Shaft Manipulated for match

Test	A	B	C	D	E	F
Shaft	138	200	196	296	340	218
	131	209	194	294	336	272
Setting	127	202	204	293	335	276
	129	200	196	295	335	277
Degrees	132	(184)	196	295	(352)	279
Probable Error	2.81°	2.94	2.78	0.89	1.92	2.65
us.	0.03	0.03	0.03	0.01	0.02	0.03

A.6 Supplementary Discussion

A.6.1 Types of Signals Usable for System: In the body of the report, a pulse modulated system was described, other types of amplitude modulation could have been used. Let us consider a sinusoidally modulated system. In such a system, the modulation frequency must be low--so that the transverse error allowable in the system. This restriction is required to eliminate ambiguity in definition of the track line. The wavelength, therefore, would have to be in the order of 500 to 1,000 meters, or 600 to 300 K.C. The phase difference between signals from the Fixed and Rotating stations would indicate lines of position. This type of system would have definite advantages over the pulse system at the receiving end at least. Bandwidth of the receiver would be reduced by a factor of 1,000, and comparably better signal to noise ratios might be expected. This would not mean total gain to the system. Available transmitter power would be reduced in almost the same ratios as bandwidth of receiver is increased. Further, sinusoidal modulation is more difficult to apply to microwave transmitters than is pulse modulation. For these reasons, a pulse system was chosen for study.

A frequency modulated system could be used. In such a system the frequency of the transmitters is varied linearly (or sinusoidally) with time, repeating the variation periodically. The frequency difference received would then determine the line of position. This type of system would use relatively new techniques of modulating microwave transmitters. The timer of such a system could be simply a phase shifting transformer (when sinusoidal modulation is used). The receiver could use intermediate frequency amplification tuned to the difference between the carrier frequencies of the fixed and rotating stations. The indicator could be a

simple cycle rate counter with a dial indication. On the surface this appears to be the best system for development. There is one difficulty in the use of such a system. The carrier frequency difference between the two stations must be controlled to tolerances less than the frequency differences to be read. This would mean control within 20 cycles out of 10,000 MC., or 2 parts in 10^9. While such control might be possible, it is very difficult to obtain. For this reason this type of system was not studied.

A.7 Bibliography

1. E. W. Keller, "The Development of Loran - A System of Long Range Navigation", an E. E. Seminar.
2. Pierce, McKenzie, and Woodward, "Loran", McGraw-Hill Book Co., 1949

   Hall, "Radar Aids to Navigation", McGraw-Hill Book Co, 1949.
3. Reintjes and Coate, "Principles of Radar", 3rd Ed., McGraw-Hill Book Co., 1952 (pg. 33).
4. Sisam, "Analytic Geometry", Henry Holt & Co., 1936, (pg. 65).

1. K. V. Cailor, "The Geological Laws - A System of Long Range Evaluation", ed. D. Spelner.

2. Lawyer, Potential, and Wonderful "Laws", McGraw-Hill Book Co., 1950

3. Mail, "Power Plus to Participation", McGraw-Hill Book Co., 1948.

3. Motorjaw and Dunbe, "Vitamins of Today", 2nd Ed., McGraw-Hill Book Co., 1952 (No. 69).

4. Shaw, "Analytic Geometry", Short Hair & Co., 1948, (No. 58).

Thesis 28826
K87 Krulish
A microwave, direction-modulated, hyperbolic navigational system.

Thesis 28826
K87 Krulish
A microwave, direction-modulated, hyperbolic navigational system.

thesK87
A microwave, direction-modulated, hyperb
3 2768 002 11547 9
DUDLEY KNOX LIBRARY